

AIR & POWER TOOLS

	PAGE		PAGE
Blow Gun	417, 431-432	In-Line FRL's	434
Compressor Accessories	430	Lubricators	428-429
Couplers	422-425	Nylon Tube Fittings	419
Cross-Reference Chart	420-421	Plugs	422-425
Die Grinders	415	Regulators	428-429
Drills	416	Sanders	417-418
Dryer, Air Line	433	Saw, Cut-Off	416
Filters	427, 429	Scalers	417
Grinders	417	Signal Bells	435
Hose & Tubing	419, 435	Swivels	434
Hose Ends	434	Tank Valves	435
		Tire Gages	433
		Tubing & Hose	419, 435
		Wrenches	418

POWER TOOLS

Rotary Tools	436
Engraver	436
Accessories	436-437

DREMEL®
 ROTARY TOOLS &
 ACCESSORIES

MILTON®
 AIR TOOLS & ACCESSORIES

VIKING
 AIR TOOLS

Air Tools — Die Grinders



Mid-Size Die Grinder



**2-YEAR
Warranty**



- Compact yet delivers more power than mini version
- Easy handling, superior 22,000 RPM
- Great for hard-to-reach areas • Model V363

ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-703	22,000	1/4"	90	4	\$154.00

V363 SET

Molded Case, Mid-Size Die Grinder, 1oz. Pneumatic Oil, Mounted Pts. (2), Carbide Burrs (4)

Order No.: 3280-736... Price Each \$195.00

Heavy Duty Die Grinder

The V324 Heavy Duty Die Grinder features 1/4" collet with 20,000 RPM performance. State-of-the-art rear exhaust design with a direct drive 4 vane motor.

- Model V324



**2-YEAR
Warranty**

ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-737	22,000	1/4"	90-100	4	\$144.00

V324 SET

Molded Case, Heavy Duty Die Grinder, 1oz. Pneumatic Oil, Flap Wheels (2), Mounted Point

Order No.: 3280-738... Price Each \$235.00

Mid-Size Angle Head Die Grinder

The V364 Mid-Size Angle Head Die Grinder is slightly larger than the mini version and has more torque for those tougher applications. Lightweight 15,000 RPM design with heavy weight durability. • Model V364



**2-YEAR
Warranty**

ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-741	20,000	1/4"	90-100	4	\$162.00

V364 SET

Molded Case, Mid-Size Angle Die Grinder, 1oz. Pneumatic Oil, 3" Pad Holder, 3" Surface Discs

Order No.: 3280-742... Price Each \$263.00

1/4" Extended Die Grinder



**1-YEAR
warranty**

- Durable precision machined and hardened steel gears
- Precision air motor with exceptionally high turning force
- Ergonomic square handle design for positive grip • High quality ball bearings for longer tool life
- Safety throttle lever • Rear exhaust • Industrial duty • Model VT3002E

ORDER NO.	AIR SPEED (R.P.M.)	AIR COLLECT SIZE	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-706	22,000	1/4"	90	4	\$125.00

Mini Die Grinder



**2-YEAR
Warranty**



Our V361 Mini Die Grinder is small in size but big in performance, allowing easy access to confined work areas. Their in-line 22,000 RPM design offers quiet, reliable service with less vibration. Fitted with 1/4" drill chuck. • Model V361

ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-734	22,000	1/4"	90-100	4	\$132.00

V361 SET

Molded Case, Mini Die Grinder, 1oz. Pneumatic Oil, Mounted Pts. (2), Carbide Burrs (4)

Order No.: 3280-735... Price Each \$232.00

1/4" Air Die Grinder



**1-YEAR
warranty**

- Model # 3280-700 - 25,000 RPM
- Model # 3280-701 - 22,000 RPM
- All ball bearing construction • Self locking safety throttle to prevent accidental starts
- Ergonomic positive grip • Rear exhaust • Viking Model # VT3001, VT5003

ORDER NO.	AIR SPEED (R.P.M.)	AIR COLLECT SIZE	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-700	25,000	1/4"	90	14	\$38.00
3280-701	22,000	1/4"	90	4	\$37.00

Mini Angle Head Die Grinder

The V362 Mini Angle Head Die Grinder is our latest, lightweight and versatile design, permitting close work in those hard-to-reach areas. It features 20,000 RPM reliability with minimal vibration.

- Model V362



**2-YEAR
Warranty**

ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-739	22,000	1/4"	90-100	4	\$211.00

V362 SET

Molded Case, Mini Angle Head Die Grinder, 1 oz. Pneumatic Oil, Flap Wheels (2), 2" Pad Holder, 2" Discs (10)

Order No.: 3280-740... Price Each \$248.00

1/4" Mini Angle Die Grinder

- Lightweight and versatile design
- Great for hard-to-reach areas
- Features 20,000 RPM reliability, minimal vibration
- Model VT3000A



**1-YEAR
warranty**

ORDER NO.	AIR SPEED (R.P.M.)	AIR COLLECT SIZE	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-704	20,000	1/4"	100	4	\$85.00

3/8" Heavy Duty Reversible Drill

- One hand quick reverse lever • Ergonomic design, elastomer handle grip
- Heavy duty ball and needle bearing construction
- Planetary gear reduction balances the drilling load, maximizing performance
- Precision air motor with exceptionally high turning force • Model VT5000



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	SPINDLE THREAD	AIR CONSUMPTION (CFM)	PRICE EACH
3280-729	1,800	3/8"	3/8"-24	4	\$156.00

1/2" Heavy Duty Reversible Drill

- One hand quick reverse lever • Ergonomic design, elastomer handle grip
- Heavy duty ball and needle bearing construction
- Planetary gear reduction balances the drilling load, maximizing performance
- Precision air motor with exceptionally high turning force • Model VT5007



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	SPINDLE THREAD	AIR CONSUMPTION (CFM)	PRICE EACH
3280-713	800	1/2"	3/8"-24	4	\$191.00

3/8" Heavy Duty Reversible Air Drill

The V341 3/8" Heavy Duty Reversible Air Drill is our latest compact powerhouse drill with a 1/2 HP motor and 2,500 RPM capacity. Built to last with its caged planetary gear design and steel gear case. • Model V341



2-YEAR Warranty

ORDER NO.	AIR SPEED (R.P.M.)	AIR INLET (IN. - NPT)	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-743	2,500	1/4-18	90-100	3-1/2	\$269.00

V341 SET

Molded Case, 3/8" Heavy Duty Reversible Air Drill, 4 oz. Pneumatic Oil, RH Cobalt Drill Bits (5) (5/64, 7/64, 5/32, 1/4, 19/64), 3/4" Wire Brush
Order No.: 3280-744... Price Each \$322.00

1/2" Heavy Duty Reversible Air Drill

The V343 1/2" Heavy Duty Reversible Air Drill provides power, endurance and leverage for the toughest jobs. This rugged drill features a 450 RPM, 1/2 HP motor, 2 stage planetary gear and an adjustable side handle. • Model V343



2-YEAR Warranty



ORDER NO.	AIR SPEED (R.P.M.)	AIR INLET (IN. - NPT)	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-745	450	1/4-18	90-100	3-1/2	\$288.00

V343 SET

Molded Case, 1/2" Heavy Duty Reversible Air Drill, 4 oz. Pneumatic Oil, RH Cobalt Drill Bits (5) (5/64, 7/64, 5/32, 1/4, 19/64)
Order No.: 3280-746... Price Each \$390.00

3/8" Non-Reversing Heavy Duty Drill


- Ergonomic design with elastomer handle grip for improved comfort
- Heavy duty ball and needle bearing construction
- Planetary gear reduction balances the drilling load and maximizes performance
- Precision air motor with exceptionally high turning force
- Model No. VT5001



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	SPINDLE THREAD	AIR CONSUMPTION (CFM)	PRICE EACH
3280-748	2,600	3/8"	3/8"-24	4	\$143.00

1/2" Non-Reversing Heavy Duty Drill

- Compact, low profile angle head enables easy access to tight areas
- Light weight and powerful
- Comfortable lever throttle
- One hand quick reverse lever
- Ergonomic design with elastomer handle grip for improved comfort
- Heavy duty ball and needle bearing construction
- Planetary gear reduction balances the drilling load and maximizes performance
- Precision air motor with exceptionally high turning force • Model No. V5006



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	SPINDLE THREAD	AIR CONSUMPTION (CFM)	PRICE EACH
3280-712	1,500	3/8"	3/8"-24	4	\$223.00

3/8" Reversible Angle Drill

- Compact, low profile angle head enables easy access to tight areas
- Light weight and powerful
- Comfortable lever throttle
- One hand quick reverse lever
- Ergonomic design with elastomer handle grip for improved comfort
- Heavy duty ball and needle bearing construction
- Planetary gear reduction balances the drilling load and maximizes performance
- Precision air motor with exceptionally high turning force • Model No. VT5004AR



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	SPINDLE THREAD	AIR CONSUMPTION (CFM)	PRICE EACH
3280-747	1,400	3/8"	3/8"-24	4	\$149.00

Mini Saw Cut-Off Tool

- Features a 3" Heavy Duty wheel and metal guard for operator safety
- 20,000 RPM direct drive motor provides low vibration cutting with a safety throttle lever
- Model No. V325



2-YEAR Warranty

ORDER NO.	AIR SPEED (R.P.M.)	INLET NPT	HOSE SIZE	AIR CONSUMPTION (CFM)	PRICE EACH
3280-749	20,000	1/4	3/8"	4	\$173.00

V325 SET

Molded Case, Mini Saw Cut-Off Tool, 1oz. Pneumatic Oil, 10 3" Cut-off Wheels
Order No.: 3280-750... Price Each \$218.00

4" Angle Grinder

- Precision air motor with exceptionally high turning force
- Sealed ball bearing motor
- Compact body for working in tight places
- Front exhaust keeps working area clear
- Safety locking lever with variable throttle to prevent accidental starts
- Removable side handle for left or right hand operation
- Unique motor controller that virtually eliminates over speeding
- Precision gearing (bevel/pin) for long life/smooth operation
- Uses Type 27 4" capacity wheels • Model No. VT3104



ORDER NO.	AIR SPEED (R.P.M.)	WHEEL SIZE	SPINDLE THREAD	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-718	11,000	4"	3/8"-24	90	6	\$209.00

4.5"/5" Right Angle Grinder

- Precision air motor with exceptionally high turning force
- Sealed ball bearing motor
- Compact body for working in tight places
- Front exhaust keeps working area clear
- Safety locking lever with variable throttle to prevent accidental start-ups
- Removable side handle for left or right hand operation
- Unique motor controller that virtually eliminates over speeding
- Precision gearing (bevel/pin) for long life and smooth operation
- Includes guard, hex wrenches and spanner
- Uses Type 27 4.5"/5" capacity wheels • Model No. VT3105



ORDER NO.	AIR SPEED (R.P.M.)	CHUCK SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-719	11,000	1/4"	90-100	6	\$209.00

Air Needle Scaler, Straight Handle

- Heat treated barrels and pistons for extended tool life
- Comfortable throttle lever
- Needleless are made form Chrome Vanadium SCM-4 steelheat treated for extended life
- Model No. VT6200



ORDER NO.	BLOWS PER MIN. (B.P.M.)	NEEDLE SIZE	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-751	4,400	0.12" - 7" long	90	10	\$173.00

Air Needle Scaler, Pistol Grip Handle

- Heat treated barrels and pistons for extended tool life
- Comfortable throttle lever
- Ergonomic rubber grip for greater vibration absorption and operator convenience
- Needles are made form Chrome Vanadium SCM-4 steelheat treated for extended life
- Model No. VT6202



ORDER NO.	BLOWS PER MIN. (B.P.M.)	NEEDLE SIZE	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-752	3,700	0.12"(3mm) 7" long	90	10	\$233.00

Air Blow Gun - 2 Tips

- 1/4" NPT Threads
- 11 CFM - OSHA round tip • 8 CFM - Point tip
- Easy one-hand operation
- Baked dry powder finish for maximum durability
- Model No. VT9000



ORDER NO.	WEIGHT (LBS)	THREAD SIZE - NPT	AIR CONSUMPTION (CFM)	PRICE EACH
3280-722	.035	1/4"	11	\$5.00

Random Orbital Palm Sander

Lightweight composite base with integrated rubber over the mold, create a non-slip feel and insulates from cold air

- Muffling system reduces sound levels with universal rear exhaust nozzle
- Hardened steel cylinder provides for longer cylinder life and less maintenance
- Low profile design improves control (3-1/2" high)
- Precision air motor with exceptionally high power
- Tighter random circular and elliptical pattern (3/16") provides higher degree of finishes on metal, wood and composites
- 5" or 6" pad • Model VT4000



ORDER NO.	AIR SPEED (R.P.M.)	WHEEL SIZE	AIR INLET (IN. - NPT)	AIR PRESSURE (P.S.I.)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-755	10,000	5"	1/4	90	5	\$231.00
3280-717	10,000	6"	1/4	90	5	234.00

High Speed Rotary Sander

Our V320 High Speed Rotary Sander offers a unique built-in regulator providing precise speed control. Its compact, lightweight design delivers 20,000 RPM low vibration sanding.

- Model V320



ORDER NO.	AIR SPEED (R.P.M.)	BACK-UP PAD SIZE (IN.)	MAX. PRESSURE (PSI)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-753	20,000	5	90	4	\$225.00

V320 SET

Molded Case, High Speed Rotary Sander, 1oz. Pneumatic Oil, Coarse Sanding Discs (2)
Order No.: 3280-754... Price Each \$231.00

1/2" Belt Sander

- Precision air motor, exceptionally high turning force

- Anti-slip on drive drum • Used for internal/external finishing
- Quick change belt replacement system
- Lightweight ergonomic handle design for control & comfort
- 360° head rotation is versatile for every job


- Model VT4504



ORDER NO.	AIR SPEED (R.P.M.)	AIR CONSUMPTION (CFM)	BELT SIZE	PRICE EACH
3280-732	16,000	14.2	1/2 x 24	\$214.00

3/8" Belt Sander

- Precision air motor, exceptionally high turning force
- Anti-slip on drive drum
- Used for internal/external finishing
- Quick change belt replacement system
- Lightweight ergonomic handle design for control & comfort
- 360° head rotation is versatile for every job
- Model VT4501

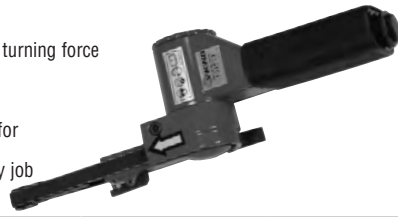

ORDER NO.	AIR SPEED (R.P.M.)	AIR CONSUMPTION (CFM)	BELT SIZE	PRICE EACH
3280-731	16,000	8	3/8 x 13	\$156.00

3/8" Ratchet Wrench

- Planetary gear design
- Combines speed and power for small applications
- Lever throttle for easy operation and enhanced speed control
- Great for hard-to-reach areas
- Lightweight and well balanced
- Model VT1001



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-725	3/8"	150	45	14	\$66.00

3/8" Professional Impact Wrench

- Durable pin clutch impact mechanism
- Ergonomic contoured elastomer handle grip for improved comfort
- Built in regulator with 4 power settings
- Easy touch trigger provides greater control and operator comfort • Model VT2100



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	SQUARE DRIVE	AIR CONSUMPTION (CFM)	PRICE EACH
3280-710	3/8"	10,000	75	3/8"	3	\$173.00

1/2" Ratchet Wrench

- Planetary gear design
- Lever throttle for easy operation and enhanced speed control
- Great for hard-to-reach areas
- Combines speed and power for exceptional durability
- Lightweight and well balanced • Model VT1003



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-726	1/2"	150	45	14	\$66.00

1/2" Professional Impact Wrench

- Durable pin clutch impact mechanism
- Ergonomic contoured elastomer handle grip for improved comfort
- Handle exhaust directs the air away from operator and workpiece
- 360° air inlet swivel prevents air hose from becoming twisted or kinked, for snag-free operator comfort
- Push button forward/reverse for single hand operation
- Easy touch trigger provides greater control and operator comfort
- Model VT2101



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-756	1/2"	8,000	241-400	13.6	\$ 212.00

1/4" Ratchet Wrench

- Planetary gear design
- Lever throttle for easy operation and enhanced speed control
- Great for hard-to-reach areas
- Combines speed and power for exceptional durability
- Ergonomic square handle design for positive grip
- Lightweight and well balanced • Model VT1000



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-707	1/4"	240	20	12	\$65.00

3/4" Professional Impact Wrench

- Durable pin clutch impact mechanism
- Ergonomic contoured elastomer handle grip for improved comfort
- Handle exhaust directs the air away from operator and workpiece
- 360° air inlet swivel prevents air hose from becoming twisted or kinked, for snag-free operator comfort
- Push button forward/reverse for single hand operation
- Easy touch trigger provides greater control and operator comfort
- Model VT2102



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-757	3/4"	4,500	700-1000	20	\$ 363.00

3/8" Butterfly Impact Wrench

- Economical rocking dog clutch for smooth operation and maximum durability
- Butterfly throttle for comfort and control; controls forward and reverse
- Compact size
- 360° swivel inlet
- Model VT2001



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-709	3/8"	10,000	75	3	\$81.00

1/2" General Purpose Impact Wrench

- Economical rocking dog impact delivers smooth operation and max. durability
- Built in regulator with 4 power settings
- Delivers max. torque in the reverse direction
- One hand push button forward and reverse • Model VT2000



ORDER NO.	SQUARE DRIVE	FREE SPEED (R.P.M.)	MAX TORQUE (FT/LBS)	AIR CONSUMPTION (CFM)	PRICE EACH
3280-711	1/2"	7,000	230	16	\$77.00

Push To Connect Nylon Tube Fittings

Easy push-in/one touch mechanism allows for easy connection/disconnection. Nylon push to connect fittings allow for maximum air flow and faster connection than standard compression fittings. Re-usable. T and elbow fittings pivot 360° for installation ease. For use with Milton "PUVEX", nylon, polyurethane, or low and high density polyethylene tubing. Milton push to connect fitting with 5/16" tube OD also fits 8mm metric tube OD.



2200-9
Ctn. Qty.: 10

MALE CONNECTOR				
PART NO.	TUBE OD	NPT	ORDER NO.	PRICE EACH
2200-2	1/4"	1/8"	3351-181	\$0.93
2200-3	1/4"	1/4"	3351-182	0.93
2200-8	3/8"	1/8"	3351-187	1.20
2200-9	3/8"	1/4"	3351-188	1.22
2200-10	3/8"	3/8"	3351-189	1.28
2200-11	3/8"	1/2"	3351-190	1.73
2200-12	1/2"	1/4"	3351-191	1.84
2200-13	1/2"	3/8"	3351-192	1.90
2200-14	1/2"	1/2"	3351-193	1.95



2202-2
Ctn. Qty.: 10

MALE SWIVEL ELBOW				
PART NO.	TUBE OD	NPT	ORDER NO.	PRICE EACH
2202-2	1/4"	1/8"	3351-195	\$1.34
2202-3	1/4"	1/4"	3351-196	1.36
2202-9	3/8"	1/4"	3351-201	1.55
2202-10	3/8"	3/8"	3351-202	1.55
2202-11	3/8"	1/2"	3351-203	3.38
2202-12	1/2"	1/4"	3351-204	3.38
2202-14	1/2"	1/2"	3351-206	3.38



2204-6

MALE SWIVEL BRANCH TREE					
PART NO.	NPT	TUBE OD	CTN. QTY.	ORDER NO.	PRICE EACH
2204-1	1/8"	1/4"	10	3351-219	\$2.16
2204-2	1/4"	1/4"	10	3351-220	2.16
2204-7	1/4"	3/8"	10	3351-225	2.61
2204-10	1/4"	1/2"	5	3351-228	4.96
2204-11	3/8"	1/2"	5	3351-229	4.96



2209-1
Ctn. Qty.: 10

ELBOW UNION			
PART NO.	TUBE OD	ORDER NO.	PRICE EACH
2209-1	1/4"	3351-259	\$1.47
2209-3	3/8"	3351-261	1.60
2209-4	1/2"	3351-262	2.32



2210-3

"TEE" UNION				
PART NO.	TUBE OD	CTN. QTY.	ORDER NO.	PRICE EACH
2210-1	1/4"	10	3351-263	\$2.26
2210-3	3/8"	10	3351-265	2.46
2210-4	1/2"	5	3351-266	4.96



2212-1
Ctn. Qty.: 5

"TEE" UNION			
PART NO.	TUBE OD	ORDER NO.	PRICE EACH
2212-1	1/4"	3351-269	\$6.66



2214-1
Ctn. Qty.: 5

FLOW CONTROL-METER OUT				
PART NO.	TUBE OD	NPT	ORDER NO.	PRICE EACH
2214-1	1/4"	1/8"	3351-281	\$6.66
2214-2	1/4"	1/4"	3351-282	7.28

"PUVEX" Tubing Reels & Coils

You no longer need polyurethane, nylon or polyethylene tubing. Puvex tubing combines the flexibility of polyurethane straight tubing, with the strength, flexibility, and maximum working pressure of nylon straight tubing, and costs only pennies more than polyethylene. Puvex has the same abrasion resistant properties of polyethylene, nylon, and polyurethane. Remains flexible even at extreme temperatures of -40°F to +175°F. Use with Milton push to connect fittings. Many uses: airlines, instrumentation, pneumatic circuitry, chemical processing, food & beverage dispensing, refrigeration, high pressure gas, vacuum-water-chemical products, and robotics.



2300

- Maximum working pressure:
1/4" 125 PSI
5/16" 75 PSI
3/8" 100 PSI
- Temperature Range: -40°F to 175°F

PUVEX TUBING					
PART NO.	LENGTH	OD	COLOR	ORDER NO.	PRICE EACH
REELS					
2340-300	300'	1/4"	Natural	3351-292	\$30.48
2341-300	300'	1/4"	Blue	3351-295	30.48
2360-300	300'	3/8"	Natural	3351-304	68.16
2361-300	300'	3/8"	Blue	3351-307	68.16
2380-300	300'	1/2"	Natural	3351-310	101.76
2381-300	300'	1/2"	Blue	3351-313	101.76
COILS					
2340-100	100'	1/4"	Natural	3351-291	10.29
2341-100	100'	1/4"	Blue	3351-294	10.29
2360-100	100'	3/8"	Natural	3351-303	22.80
2361-100	100'	3/8"	Blue	3351-306	22.96
2380-100	100'	1/2"	Natural	3351-309	34.24
2381-100	100'	1/2"	Blue	3351-312	34.24

Coupler & Plug Interchanges

With the Milton "Match-up system" all couplers and plugs with same letter code (on face of skin-card) can be used together regardless of thread sizes. Milton "M" style "Kwik-change" couplers and plugs will INTERCHANGE with all manufacturers who comply with the dimensional requirements of military specification MIL-C-4109

MILTON	AMFLO	ARO	CAMEL	COIL HOSE	DIXON	FORNEY	LINCOLN	NAPA	PARKER	TRU-FLATE	MILTON
1/4" Basic size: MILTON INDUSTRIAL "M" STYLE											
711	C20-AU		61-572			75305	5878	90-669		13-201	711
715	C20	MSCF22-000	61-573	150	DC20	75317	632004	90-670	B23	13-235/13-236	715
716	C21	MSCM22-000	61-574	152	DC21	75316		90-672	B22	13-224/13-225	716
717	C20-42	MSCH22-000	61-575	153	DC2042	75480		90-671	B20-3B	13-264	717
717-6	C20-44	MSCH23-000	61-720		DC2044					13-266	717-6
718	C20-23	MSCF23-000	61-718	151	DC2023	75479		90-667	B23E	13-236	718
719	C21-03	MSCM23-000	61-716	155	DC2103			90-657	B22E	13-225	719
726	CP21-01	23902-110		1504	DC2101		630102	90-675	H0C		726
727	CP21	23902-210	61-578	1501	DCP21	75301	630104	90-674	H2C	12-224/12-225	727
728	CP20	23902-200	61-579	1502	DCP20	75302	630204	90-676	H3C	12-234/12-235	728
729	CP20-21	23902-100		1509	DCP2021			90-665	H1C		729
731	CP22		61-023								731
732	CP20-23	23902-300		1505	DCP2023			90-659	H3C-E	12-236	732
733	CP21-03	23902-310	61-535	1503	DCP2103	75471		90-677	H2C-E	12-226	733
736	CP21-42	23902-220	61-576	1506	DCP2142			90-673	H8C	12-264	736
736-6	CP21-44	23902-420		1508	DCP2144	75472			H9C	12-266	736-6
745						75527				13-510/13-511	745
746						75526				13-508/13-509	746
755	C40B	MSCF22-X00	61-013		DCB20	75520		90-615	B33	13-755	755
756	C41B	MSCM22-X00	61-011		DCB21	75521		90-617	B32	13-756	756
1717-4	C20-42L	MSCP22-000							B20-3BP		1717-4
1717-6	C20-44L	MSCP23-000							B20-5BP		1717-6
1736-4	CP21-42L	23902-227							H8CP		1736-4
1736-6	CP21-44L	23902-228							H9CP		1736-6
1/4" Basic size: ARO 210 "A" STYLE											
772						75522				13-301	772
775	C38, C46	210	61-518, 61-526	140	DC38	75318		90-613	B53	13-334/13-335	775
776	C37, C45	210-212	61-527, 61-581		DC37	75482			B50	13-324/13-325	776
776-4	C38-42	210-022			DC3842			90-679	B50-3BP		776-4
776-6	C38-44	210-215			DC3844				B50-5BP		776-6
777	CP37	2608	61-528	1401	DCP37	75303	13329	90-618	A2C	12-324/12-325	777
777-4	CP37-42	3946		1406	DCP3742				A8C		777-4
777-6	CP37-44	22238			DCP3744						777-6
778	CP38	2609	61-529	1402	DCP38	75473	13331	90-620	A3C	12-334/12-335	778
1776-4	C38-42L	210-227									1776-4
1776-6	C38-44L	210-028									1776-6
1777-4	CP37-42L	6944							A8CP		1777-4
1777-6	CP37-44L										1777-6
3/8" Basic size: ARO "AA" STYLE											
1875	C36	310			DC36						1875
1877	CP35	3804			DCP35						1877
1878	CP36	3806			DCP36						1878
1/4" Basic size: LINCOLN "L" STYLE											
790	C28	LNCF22-000	61-548	170	DC28	75523 w/plug	815	90-644	B73	13-434/13-435	790
791	CP27	LNPM22-000	61-550	1701	DCP27	75304	11659	90-648	L2C	12-424/12-425	791
792	CP28	LNPF22-000	61-551	1702	DCP28	75524	11661	90-650	L3C	12-434/12-435	792
794	C27	LNCM22-000	61-486		DC27	75525		90-645		13-424/13-425	794
1/4" Basic size: TRU-FLATE/PARKER "T" STYLE											
779	CP12		61-544							12-104	779
780			61-543					90-634			780
781	CP14		61-552					90-652			781
782						75519		90-624		13-101	782
783	CP1	TFPM22-000	61-538	1601	DCP1	75300	5872	90-628	2C	12-124/12-125	783
783-4	CP1-42	TFPH22-000		1606	DCP142	75470		90-630	8C	12-117	783-4
783-6	CP1-44	TFPH23-000		1608	DCP143			90-626	9C		783-6
784	CP2	TFPF22-000	61-539	1602	DCP2	75308	5873	90-600	3C	12-134/12-135	784
785	C2	TFCF22-000	61-523	160	DC2	75315	5871	90-610	B13	13-134/13-135	785
786	C1	TFCM22-000	61-524	162	DC1	75309	5870	90-607	B12	13-124/13-125	786
786-4	C2-42	TFCH22-000		163	DC242			90-611	B10-3B	13-164	786-4
786-6	C2-44	TFCH23-000		166	DC244			90-609	B10-5B		786-6
787	C2R		61-487, 61-545			75478				13-136/13-137	787
788	C2-23	TFCF23-000	61-704							13-138	788
789	C1-03	TFCM23-000			DC103						789
1783-4	CP1-42L	TFPP22-000							8CP		1783-4
1783-6	CP1-44L	TFPP23-000							9CP		1783-6
1786-4	C2-42L	TFCH22-000							B10-3BP		1786-4
1786-6	C2-44L	TFCH23-000							B10-5BP		1786-6

Coupler & Plug Interchanges

MILTON	AMFLO	ARO	CAMEL	COIL HOSE	DIXON	FORNEY	LINCOLN	NAPA	PARKER	TRU-FLATE	MILTON
3/8" Basic size: MILTON INDUSTRIAL "H" STYLE											
1796-6	C26-44L	MSCP33-000							24-5BP		1796-6
1797-6	CP25-44L	23903-28							H5EP		1797-6
1833	C26-22	MSCM32-000		582	DC2622			90-629	25C		1833
1834	C25-02							90-625			1834
1835	C26	MSCF33-000	61-482	580	DC26	75321	642006	90-680	25	13-536/13-537	1835
1836	C25	MSCM33-000	61-483	581	DC25	75483		90-682	24	13-526/13-527	1836
1836-6	C26-44	MSCH33-000		586	DC2644			90-635	24-6B		1836-6
1837	CP25	23903-310	61-484	5801	DCP25	75307	640108	90-683	H2E	12-526/12-527	1837
1837-6	CP25-44	23903-420		5806	DCP2544			90-651	H5E		1837-6
1838	CP26	23903-300	61-485	5802	DCP26	75474	640206	90-681	H3E	12-536/12-537	1838
1839	CP25-02	23903-210		5803	DCP2502		640104	90-605	H0E	12-525	1839
1840	CP26-22	23903-200		5804	DCP2622		640204	90-606	H1E	12-535	1840
3/8" Basic size: TRU-FLATE/PARKER "P" STYLE											
1746-6	C6-44L	TFCP23-000							14-5BP		1746-6
1747-6	CP5-44L	TFPP23-000							5EP		1747-6
1803	C8	TFCF32-000	61-476	592	DC8	75485		90-686	15C	13-610/13-611	1803
1804	C7	TFCM32-000	61-478		DC7			90-684		13-602	1804
1805	C6	TFCF33-000	61-553	590	DC6	75320	5874	90-654	15	13-612/13-613	1805
1806	C5	TFCM33-000	61-554	591	DC5	75484		90-656	14	13-604	1806
1806-6	C6-44	TFCH33-000		598	DC644			90-521	14-5B	13-666	1806-6
1807	CP5	TFPM33-000	61-558	5901	DCP5		5875	90-658	2E	12-604/12-605	1807
1807-6	CP5-44	TFPH33-000		5906	DCP544			90-530	5E		1807-6
1808	CP6	TFPF33-000	61-559	5902	DCP6	75476	5876	90-660	3E	12-612	1808
1809	CP7	TFPM32-000	61-480	5903	DCP7	75475		90-685	0E	12-602/12-603	1809
1810	CP8	TFPF32-000	61-481	5904	DCP8			90-687	1E	12-610	1810
1/2" Basic size: MILTON INDUSTRIAL "G" STYLE											
1813	C10-23	TFCF43-000	61-472	123	DC1023			90-690	17E	13-710	1813
1814	C9-03	TFCM43-000		121	DC903			90-688	16E	13-702	1814
1815	C10	TFCF44-000	61-563	120	DC10		652008	90-662	B37	13-712/13-713	1815
1816	C9	TFCM44-000	61-564	122	DC9			90-664	B36	13-704	1816
1855											1855
1857	CP17	23904-410	61-134	1201	DCP17		650108	90-578	H2F	12-752	1857
1858	CP18	23904-400	61-137	1202	DCP18		650208	90-588	H3F	12-762	1858
1859	CP17-03	23904-310	61-133	1203	DCP1703		650106	90-575	H0F		1859
1860	CP18-23	23904-3	61-136	1204	DCP1823		650206	90-587	H1F		1860
1/2" Basic size: TRU-FLATE/PARKER "G" STYLE											
1813	C10-23	TFCF43-000	61-472	123	DC1023			90-690	17E	13-710	1813
1814	C9-03	TFCM43-000		121	DC903			90-688	16E	13-702	1814
1815	C10	TFCF44-000	61-563	120	DC10			90-662	B37	13-712/13-713	1815
1816	C9	TFCM44-000	61-564	122	DC9			90-664	B36	13-704	1816
1817	CP9	TFPM44-000	61-568		DCP9			90-666	2F	12-704/12-705	1817
1818	CP10	TFPF44-000	61-569		DCP10			90-668	3F	12-712	1818
1819	CP9-03	TFPM43-000	61-474		DCP903			90-689	0F	12-702	1819
1820	CP10-23	TFPF43-000	61-475		DCP1023			90-691	1F	12-710	1820

Milton Industrial Interchange Series



"M"STYLE 1/4" BASIC SIZE Ctn. Qty.: 10

NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH	BARB	ORDER NO.	PRICE EACH
COUPLERS									
1/4"	S-715	3350-389	\$4.08	S-716	3350-392	\$4.08	717	3350-394	\$5.22
3/8"	S-718	3350-399	\$5.34	S-719	3350-402	\$5.34	717-6	3350-396	\$5.57



"M"STYLE 1/4" BASIC SIZE Ctn. Qty.: 10, Male/Female: 2/cd

NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
PLUGS											
1/4"	S-728	2	3350-409	\$1.92	S-727	2	3350-406	\$1.81	736	3350-419	\$1.71
3/8"	S-732	2	3350-414	\$3.14	S-733	2	3350-417	\$3.14	736-6	3350-421	\$1.82

"M-STYLE 1/4" COUPLER & PLUG COMBOS AND KITS

KIT PART NO.	DESCRIPTION	COUPLER	PLUG	CTN. QTY.	ORDER NO.	PRICE EACH
S-711	M style coupler & plug combo	(1) 715	(1) 727	10	3350-383	\$4.96
S-210	M style coupler & plug kit- 12 pc.	(2) 715	(8) 727, (2) 728	5	3350-068	\$17.06
S-211	M style coupler & plug kit- 5 pc.	(1) 715	(3) 727, (1) 728	10	3350-069	\$7.65
S-212	M style coupler & plug kit- 7 pc.	(1) 715	(3) 727, (3) 728	10	3350-070	\$9.50



"H"STYLE 3/8" BASIC SIZE Ctn. Qty.: 5

NPT THREAD	FEMALE	ORDER NO.	PRICE PER CARD	MALE	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
COUPLERS									
1/4 "	S-1833	3350-995	\$8.72	1834	3350-997	\$8.77	—	—	—
3/8"	S-1835	3351-000	\$8.72	S-1836	3351-003	\$8.72	1836-6	3351-005	\$9.54

"H"STYLE 3/8" BASIC SIZE Ctn. Qty.: 10, Male/Female: 2/cd

NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
PLUGS											
1/4 "	S-1840	2	3351-018	\$3.22	S-1839	2	3351-015	\$3.22	—	—	—
3/8"	S-1838	2	3351-012	\$3.22	S-1837	2	3351-007	\$3.25	1837-6	3351-009	\$2.37



"G"STYLE 1/2" BASIC SIZE Ctn. Qty.: 5

NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
3/8"	1813	3350-976	\$10.80	1814	3350-977	\$11.65
1/2"	S-1815	3350-979	\$10.88	S-1816	3350-982	\$10.88
PLUGS						
1/4"	—	—	—	1855	3351-020	\$2.48
3/8"	1860	3351-024	\$2.85	1859	3351-023	\$2.64
1/2"	1858	3351-022	\$2.85	1857	3351-021	\$2.67

M-Style Couplers & Plugs

Milton M-style "Kwik-change" couplers and plugs will interchange with all manufacturers who comply with the dimensional requirements of military specification MIL-C-4109.

- M-style coupler bodies are brass with brass sleeves
- M-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 40 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

M-Style Synthetic Washer

- Replacement M-Style part

Order No. 3350-457 Price Each: \$0.32

H-Style Couplers & Plugs

- H-style coupler bodies steel, plated to resist rust
- H-style plugs are case hardened steel plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

G-Style Couplers & Plugs (Industrial Interchange)

- G-style coupler bodies are steel, plated to resist rust
- G-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 99 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

ARO Interchange Series

2



S-775



S-776



S-776-4

A 210 Style Couplers & Plugs

- A-style couplers are push type
- A-style coupler bodies are steel, plated to resist rust
- A-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 34 SCFM
- Seals: Buna-N

Ctn. Qty.: 10

"A 210" STYLE 1/4" BASIC SIZE									
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH	BARB	ORDER NO.	PRICE EACH
COUPLERS									
1/4"	S-775	3350-460	\$5.28	S-776	3350-463	\$6.18	776-4	3350-465	\$6.70
3/8"	—	—	—	—	—	—	776-6	3350-466	\$6.85

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.



S-777



S-778



S-777-4

Ctn. Qty.: 10 Male/Female: 2/cd

"A 210" STYLE 1/4" BASIC SIZE											
NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
PLUGS											
1/4"	S-778	2	3350-475	\$1.98	S-777	2	3350-468	\$1.97	777-4	3350-470	\$1.73
3/8"	—	—	—	—	—	—	—	—	777-6	3350-472	\$1.76
A-STYLE 1/4" COUPLER & PLUG COMBOS AND KITS											
KIT PART NO.	DESCRIPTION			COUPLER	PLUG	ORDER NO.	PRICE EACH				
S-772	A style coupler & plug combo			(1) 775	(1) 777	3350-458	\$6.21				
S-213	A style coupler & plug kit - 5 pc.			(1) 775	(3) 777, (1) 778	3350-071	\$9.02				



1875



1877



1878

AA-ARO 310 Style Couplers & Plugs


- AA-style couplers are push type
- AA-style coupler bodies are heavy duty steel
- AA-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 59 SCFM
- Seals: Buna-N

Ctn. Qty.: 5

"AA 310" STYLE 3/8" BASIC SIZE							
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH	
COUPLERS							
3/8"	1875	3351-048	\$9.82	—	—	—	
PLUGS							
3/8"	1878	3351-050	\$2.13	1877	3351-049	\$1.94	

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

Tru-flate (Automotive) Interchange Series



S-785



S-786



786-4

T Style Couplers & Plugs

- T-style coupler bodies are brass
- T-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 40 SCFM
- Seals: Buna-N

Ctn. Qty.: 10

"T" STYLE 1/4" BASIC SIZE									
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH	BARB	ORDER NO.	PRICE EACH
COUPLERS									
1/4 "	S-785	3350-490	\$4.56	S-786	3350-493	\$4.58	786-4	3350-495	\$5.52
3/8"	788	3350-499	\$5.42	789	3350-500	\$5.42	786-6	3350-496	\$5.58

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

MILTON® Air Couplers & Plugs

Tru-flate (Automotive) Interchange Series (Continued)

2



S-784



S-783



783-4

T Style Couplers & Plugs

- T-style coupler bodies are brass
- T-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 40 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

"T" STYLE 1/4" BASIC SIZE											
Ctn. Qty.: 10 Male/Female: 2/cd											
NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
PLUGS											
1/4"	S-784	2	3350-487	\$1.92	S-783	2	3350-482	\$1.92	783-4	3350-484	\$1.71
3/8"	—	—	—	—	—	—	—	—	783-6	3350-485	\$1.71
T-STYLE 1/4" COUPLER & PLUG COMBOS AND KITS											
KIT PART NO.	DESCRIPTION			COUPLER	PLUG	ORDER NO.	PRICE EACH				
S-782	T style coupler & plug combo			(1) 785	(1) 783	3350-480	\$5.49				
S-215	T style coupler & plug kit - 5 pc.			(1) 785	(3) 783, (1) 784	3350-072	\$8.29				



S-1807



S-1808



1807-6

P Style Couplers & Plugs

- P-style coupler bodies are heavy duty steel
- P-style plugs are case hardened steel plated to resist rust
- Bodies have 8 locking balls
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 68 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.

"P" STYLE 3/8" BASIC SIZE											
Ctn. Qty.: 10 Male/Female: 2/cd											
NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD	BARB	ORDER NO.	PRICE EACH
PLUGS											
1/4"	S-1810	2	3350-973	\$3.44	S-1809	2	3350-970	\$3.25	—	—	—
3/8"	S-1808	2	3350-967	\$3.82	S-1807	2	3350-963	\$3.33	1807-6	3350-965	\$2.29



S-1803



1804



1806-6

Push Button Safety Couplers

Double click to engage properly. First click locks coupler and plug; the second click engages the air pressure. To disconnect, push button twice. First push relieves pressure; second push allows plug and coupler to be disengaged.



S-99705



S-99706



S-99773



S-99774

Ctn. Qty.: 5

SAFETY COUPLERS					
PART NO.	THREAD TYPE	STYLE	NPT SIZE	ORDER NO.	PRICE EACH
S-99705	Female	M	1/4"	3351-355	\$10.64
S-99706	Male	M	1/4"	3351-356	10.64
S-99773	Female	A	1/4"	3351-357	10.85
S-99774	Male	A	1/4"	3351-358	10.85

G Style Couplers & Plugs (Tru-flate/Automotive)

- G-style coupler bodies are steel plated to resist rust
- G-style plug bodies are case hardened steel to resist rust
- Maximum inlet pressure: 300 PSI
- Air flow: 99 SCFM
- Maximum temperature: 250° F
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.



S-1813



S-1814



S-1818




S-1817

"G" STYLE 1/2" BASIC SIZE						
Ctn. Qty.: 5						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
3/8"	1813	3350-976	\$10.80	1814	3350-977	\$11.65
1/2"	S-1815	3350-979	\$10.88	S-1816	3350-982	\$10.88

"G" STYLE 1/2" BASIC SIZE						
Ctn. Qty.: 5						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
PLUGS						
3/8"	1820	3350-992	\$2.66	1819	3350-990	\$2.51
1/2"	S-1818	3350-988	\$3.12	S-1817	3350-985	\$2.80

V-Style Hi-Flow Interchange Series



S-764

S-765

Ctn. Qty.: 10

"V" STYLE 1/4" BASIC SIZE						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
1/4"	S-764	3350-450	\$4.96	S-765	3350-452	\$4.96
3/8"	S-766	3350-454	\$5.22	S-767	3350-456	\$5.22



S-761-1

S-760-1


Ctn. Qty.: 10, 2/cd

"V" STYLE 1/4" BASIC SIZE								
NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD
PLUGS								
1/4"	S-761-1	2	3350-440	\$2.38	S-760-1	2	3350-436	\$2.30
3/8"	S-763-1	2	3350-448	\$2.93	S-762-1	2	3350-444	\$2.82

V Style Couplers & Plugs

- V-style specifically designed for HVLP (High Volume Low Pressure) applications.
- V-style couplers will accept "M" and "A" style plugs, however to retain max. flow, use "V" style plugs
- V-style couplers are push-type
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 74 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.



S-764

S-760-1

"V" STYLE 1/4" BASIC SIZE					
KIT NO.	DESCRIPTION	COUPLER	PLUG	ORDER NO.	PRICE EACH
V-STYLE 1/4" COUPLER & PLUG COMBOS AND KITS					
S-216	1/4" V style coupler & plug combo	(1) 764	(1) 760-1	3350-073	\$6.03
S-217	1/4" V style coupler & plug kit- 6 pc.	(2) 764	(2) 760-1, (2) 761-1	3350-074	\$13.73

Lincoln Interchange Series — L Style Couplers & Plugs

- L-style couplers are push type
- L-style couplers are steel, plated to resist rust
- L-style plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 32 SCFM
- Seals: Buna-N

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.



S-790

794

Ctn. Qty.: 10

"L" STYLE 1/4" BASIC SIZE						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
1/4"	S-790	3350-502	\$7.68	794	3350-510	\$8.16



S-792

S-791

Ctn. Qty.: 10, 2/cd

"L" STYLE 1/4" BASIC SIZE								
NPT THREAD	FEMALE	CARD PACK	ORDER NO.	PRICE PER CARD	MALE	CARD PACK	ORDER NO.	PRICE PER CARD
PLUGS								
1/4"	S-792	2	3350-508	\$3.01	S-791	2	3350-505	\$2.85

AMT-Style Interchange Series—3-Way Couplers

- AMT-style are push type with drag guard
- Heavy duty brass-rust resistant
- Accepts the 3 most popular 1/4" basic style plugs sold
 - 1- Milton or industrial style plugs (M-style)
 - 2- Aro 210-style plugs (A-style)
 - 3- Tru-Flate/Parker automotive style plugs (T-style)

WARNING: COUPLERS IN THIS SECTION ARE FOR USE WITH SHOP AIR ONLY.



S-745

S-746

Ctn. Qty.: 10

"AMT" STYLE 1/4" BASIC SIZE						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
1/4"	S-745	3350-424	\$7.57	S-746	3350-427	\$7.65

Straight Thru Couplers & Plugs

- Straight thru couplers are brass with stainless steel balls and spring
- Straight thru plugs are case hardened steel, plated to resist rust
- Compatible with other major manufacturers of straight thru couplers
- Application: high pressure washers, industrial carpet cleaning



1765

1762

1764

1763


Ctn. Qty.: 10

STRAIGHT THRU 1/4" & 3/4" BASIC SIZE						
NPT THREAD	FEMALE	ORDER NO.	PRICE EACH	MALE	ORDER NO.	PRICE EACH
COUPLERS						
1/4 "	1761	3350-919	\$5.28	1762	3350-921	\$6.18
3/8"	1765	3350-927	\$5.79	1766	3350-929	\$6.21
PLUGS						
1/4"	1764	3350-925	\$1.66	1763	3350-923	\$1.33
3/8"	1768	3350-933	\$2.37	1767	3350-931	\$2.69

TECH TIPS


BUILDING AN EFFICIENT AIR SYSTEM

Compressed air powered equipment and machinery are critical elements in the productivity, efficiency, and economy of today's industry and quality air is the essential element. Water and dirt cause more problems in compressed air lines than anything else. High speed pneumatic production lines operate efficiently because of air dryers and filters that remove moisture and impurities from the air, which results in eliminating downtime. Regulators and lubricators can be added to control and lubricate downstream equipment. A good air system is the key to saving time, money and to operating at maximum efficiency.

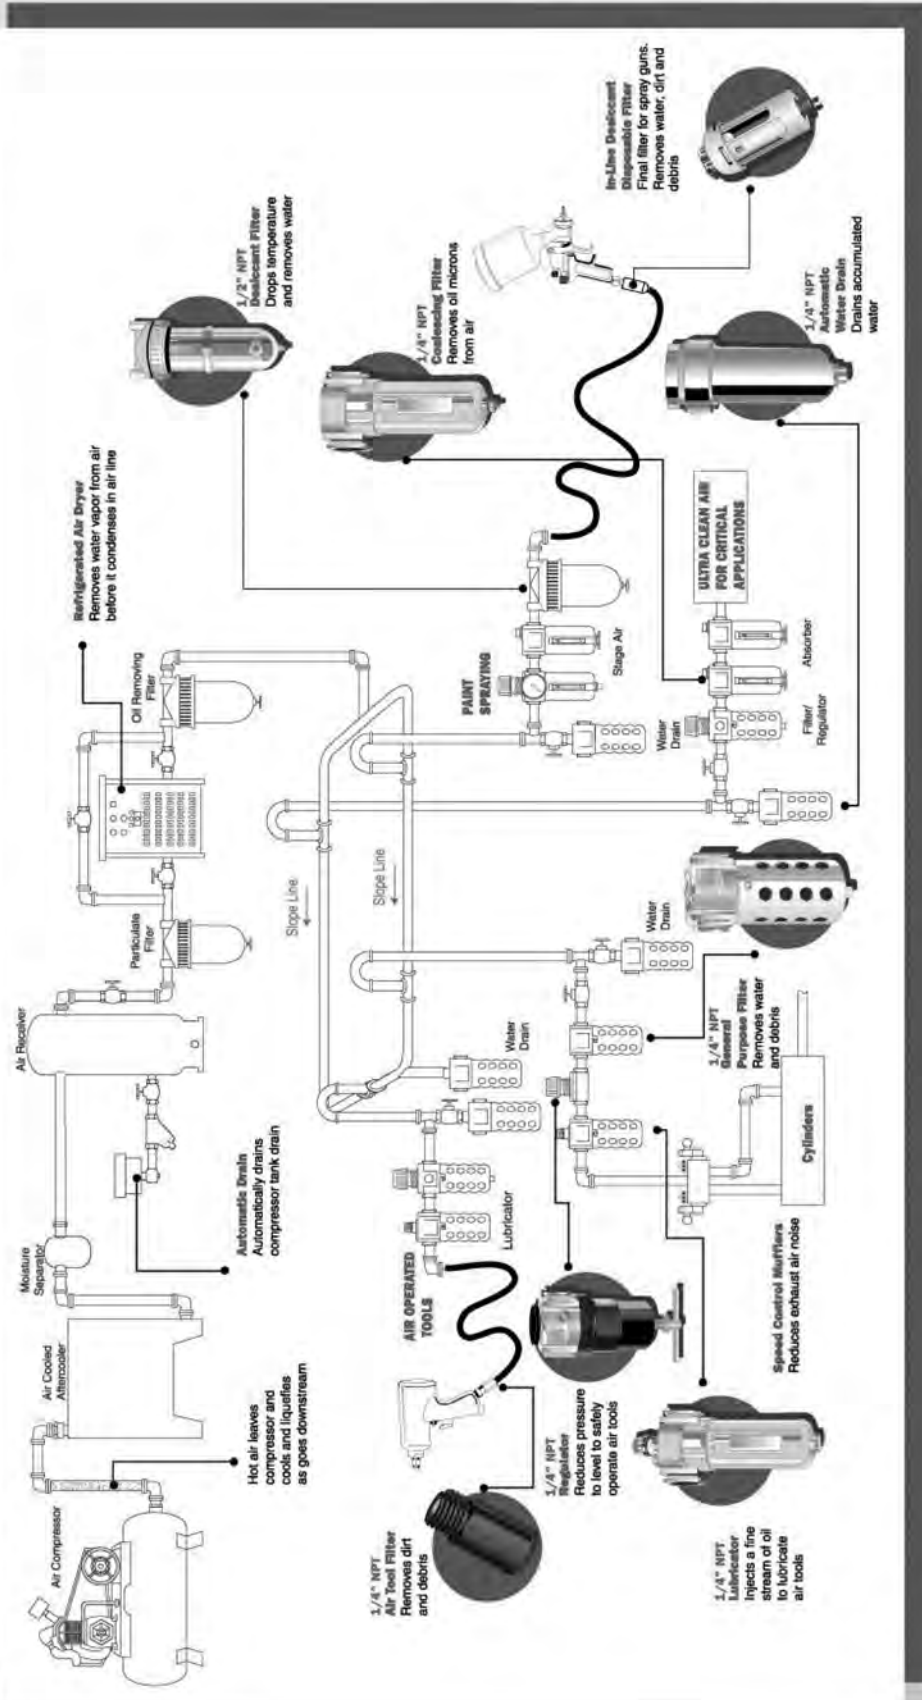

5 IMPORTANT STEPS TO AN AIR SYSTEM SETUP

1. Main line filter and regulator should be placed at least 20 feet from the compressor. The air will cool down, allowing much of the water vapor to condense naturally for removal by filtration.
2. Main line piping should slope down from point of origin by 1/8" per foot. Any water in the line will flow down to the lowest point for draining.
3. All line drops (work stations) should be taken from the top of the main line. This prevents water from flowing into branch lines.
4. Galvanized pipe is recommended when building an air system.
5. Follow illustration to the right when building a work station drop.

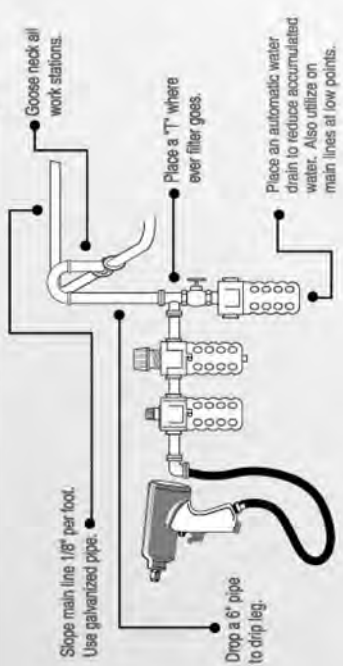

Micro Filters



1018



1018-8

- All micro filters supplied with preassembled AUTOMATIC OVERNIGHT DRAIN
- Porous bronze 40 micron filter element allows less pressure drop and longer cleaning intervals
- Safety metal bowl guards or metal bowls standard on 1/4", 3/8", 1/2" models
- Metal bowls only on 3/4" and 1" models
- 3 stage baffle system for exceptional moisture removal.
- Sintered bronze elements are permanent and cleanable
- Light weight aluminum die-cast housing
- Element range 10 or 40 microns exactly matching filter and air flow needs
- Corrosion resistant metal bowls
- 1022-8 and 1022-10 include sight glass for visual check of condensation collection

WARNING: FOR COMPRESSED AIR SERVICE ONLY. NOT TO BE USED ON LIFE SUPPORT SYSTEMS OR BREATHING AIRSYSTEMS. NEVER USE POLYCARBONATE PLASTIC BOWLS ON AIR SUPPLIED BY A COMPRESSOR LUBRICATED WITH SYNTHETIC OILS OR OIL CONTAINING PHOSPHATE ESTERS OR CHLORINATE HYDROCARBONS.

Coalescing Filters

An extremely efficient filter designed for applications that require air free of oil and all foreign particles. Effective filtration and low pressure drop make these filters perfect for fluidics, body shop, spray painting, food processing, instrumentation and pharmaceuticals.

- Automatic overnight drain
- Metal bowl
- .03 SUB-MICRON = 99.97 efficiency
- 1037-8 includes sight glass for visual check of condensation collection



1035



1037-8

COALESCING FILTERS									
PART NO.	NPT	ORDER NO.	PRICE EACH	BOWL TYPE	BOWL CAPACITY	MAX. SCFM	MAX INLET PSI	TEMP. OP. RANGE	FILTER ELEMENT(MICRON)
1035	1/4"	3350-581	\$89.60	METAL	6 OZ	24	250	40°F-200°F	.03 Sub micron
1036	3/8"	3350-582	90.16	METAL	6 OZ	37	250	40°F-200°F	.03 Sub micron
1037	1/2"	3350-583	90.40	METAL	6 OZ	37	250	40°F-200°F	.03 Sub micron
1037-8	3/4"	3350-584	134.16	METAL	10 OZ	60	250	40°F-160°F	.03 Sub micron

MICRO & MINI FILTERS

PART NO.	NPT	ORDER NO.	PRICE EACH	BOWL TYPE	BOWL CAPACITY	MAX. SCFM	MAX INLET PSI	TEMP. OP. RANGE	FILTER ELEMENT(MICRON)
1018	1/4"	3350-552	\$39.97	POLY w/GUARD	5 OZ	48	150	40°F-120°F	40, 10 opt.
1018-8	1/4"	3350-554	46.72	METAL	6 OZ	48	250	40°F-160°F	40, 10 opt.
1019	3/8"	3350-557	39.97	POLY w/ GUARD	5 OZ	75	150	40°F-120°F	40, 10 opt.
1019-8	3/8"	3350-559	46.32	METAL	6 OZ	75	250	40°F-160°F	40, 10 opt.
1020	1/2"	3350-560	40.64	POLY w/ GUARD	5 OZ	100	150	40°F-120°F	40, 10 opt.
1020-8	1/2"	3350-562	46.32	METAL	6 OZ	100	250	40°F-160°F	40, 10 opt.
1022-8	3/4"	3350-563	93.92	METAL	10 OZ	230	250	40°F-160°F	40
1022-10	3/4"	3350-564	145.52	METAL	20 OZ	245	250	40°F-160°F	40
1120-8	1/2"	3350-682	63.68	METAL	9 OZ	115	250	40°F-160°F	40
1122-8	1"	3350-683	108.64	METAL	29 OZ	300	250	40°F-160°F	40
S-1144	1/4"	3350-694	25.92	POLY	1 OZ	27	150	40°F-120°F	20
1144 M	1/4"	3350-697	31.97	METAL	1 OZ	27	250	40°F-120°F	20
1144-2	1/8"	3350-696	31.97	METAL	1 OZ	27	250	40°F-120°F	20

REPAIR PARTS

MICRO FILTER PART NO.	BOWL KIT	ORDER NO.	PRICE EACH	FILTER (40 MICRON)	ORDER NO.	PRICE EACH	FILTER (10 MICRON)	ORDER NO.	PRICE EACH
1018	1018-P	3350-556	\$23.52	1118-1	3350-679	\$9.36	1118-2	3350-680	\$10.72
1018-8	1018-M	3350-555	37.92	1118-1	3350-679	9.36	1118-2	3350-680	10.72
1019	1018-P	3350-556	23.52	1118-1	3350-679	9.36	1118-2	3350-680	10.72
1019-8	1018-M	3350-555	37.92	1118-1	3350-679	9.36	1118-2	3350-680	10.72
1020	1018-P	3350-556	23.52	1118-1	3350-679	9.36	1118-2	3350-680	10.72
1020-8	1018-M	3350-555	37.92	1118-1	3350-679	9.36	1118-2	3350-680	10.72
1022-8	P1022-11	3351-360	71.32	P1022-18	3351-364	16.22	-	-	-
1022-10	P1022-12	3351-361	97.26	P1022-20	3351-365	18.70	-	-	-
1120-8	P1120-19	3351-362	36.90	P1120-17	3351-366	34.28	-	-	-
1122-8	P1155-1	3351-363	121.64	P1121-1	3351-367	38.74	-	-	-
(20 MICRON)									
S-1144	1152	3350-706	10.37	1144-1	3350-695	6.16	-	-	-
1144 M	1152-1	3350-707	16.96	1144-1	3350-695	6.16	-	-	-
1144-2	1152	3350-706	10.37	1144-1	3350-695	6.16	-	-	-


REPAIR PARTS

COALESCING FILTER PART NO.	BOWL KIT	ORDER NO.	PRICE EACH	FILTER	ORDER NO.	PRICE EACH
1035	1018-M	3350-555	\$37.92	P1035-1	3351-368	\$30.26
1036	1018-M	3350-555	37.92	P1035-1	3351-368	30.26
1037	1018-M	3350-555	37.92	P1035-1	3351-368	30.26
1037-8	P1022-11	3351-360	71.32	P1037-5	3351-369	60.06

Mid-Size & Heavy Duty Regulators

The Milton heavy duty and mid-size RELIEVING TYPE regulators offer stable downstream air pressure over a wide range of air flows with accurate control, fast response and minimal pressure drop. Offset 1/4" gage ports can also serve as two 1/4" supply lines, allowing up to three regulated full flow out ports. Gage not included, but available as an accessory.

WARNING: REGULATORS SHOULD ALWAYS BE PRECEDED BY A FILTER TO ELIMINATE DAMAGE TO THE UNIT OR INACCURATE AIR FLOW.

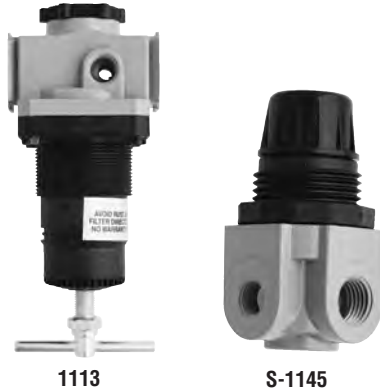

REPAIR KITS						
REG. PART NO.	DIAPHRAGM KIT	ORDER NO.	PRICE EACH	VALVE KIT	ORDER NO.	PRICE EACH
1113	1113-17	3350-672	\$9.87	P1113-18	3351-370	\$19.46
1113-8	1113-17	3350-672	9.87	P1113-18	3351-370	19.46
1114	1113-17	3350-672	9.87	P1113-18	3351-370	19.46
1114-8	1113-17	3350-672	9.87	P1113-18	3351-370	19.46
1115	1113-17	3350-672	9.87	P1113-18	3351-370	19.46
1115-8	1113-17	3350-672	9.87	P1113-18	3351-370	19.46
1026	1113-17	3350-672	9.87	P1026-18	3351-371	14.98
1026-8	1113-17	3350-672	9.87	P1026-18	3351-371	14.98
1027	1113-17	3350-672	9.87	P1026-18	3351-371	14.98
1027-8	1113-17	3350-672	9.87	P1026-18	3351-371	14.98
S-1145	P1145-10	3351-372	12.52	P1145-12	3351-373	22.84
S-1146	P1145-10	3351-372	12.52	P1145-12	3351-373	22.84
1145-2	P1145-10	3351-372	12.52	P1145-12	3351-373	22.84

- Inlet pressure: 250 PSI
- Operating temperature: 40° F to 120° F
- Aluminum die-cast body
- Buna-N diaphragm and O rings
- Balanced piston, molded rubber seat

MID-SIZE & HEAVY DUTY REGULATORS								
PART NO.	NPT	ORDER NO.	PRICE EACH	MAX. SCFM	OP. RANGE PSI	MAX INLET PSI	GAGE PORT NPT	TEMP. OP. RANGE
1113	1/4"	3350-669	\$ 39.44	50	5-125	250	1/4"	40°F-120°F
1113-8	1/4"	3350-671	43.04	50	10-250	250	1/4"	40°F-120°F
1114	3/8"	3350-673	39.44	80	5-125	250	1/4"	40°F-120°F
1114-8	3/8"	3350-675	43.04	80	10-250	250	1/4"	40°F-120°F
1115	1/2"	3350-676	49.36	100	5-125	250	1/4"	40°F-120°F
1115-8	1/2"	3350-678	53.60	100	10-250	250	1/4"	40°F-120°F
1026	3/4"	3350-565	64.48	220	5-125	250	1/4"	40°F-120°F
1026-8	3/4"	3350-566	68.77	220	10-250	250	1/4"	40°F-120°F
1027	1"	3350-567	87.92	250	5-125	250	1/4"	40°F-120°F
1027-8	1"	3350-568	95.12	250	10-250	250	1/4"	40°F-120°F
S-1145	1/4"	3350-698	24.32	25	5-125	250	1/8"	40°F-120°F
S-1146	1/4"	3350-702	23.04	25	0-60	250	1/8"	40°F-120°F
1145-2	1/8"	3350-701	24.32	25	5-125	250	1/8"	40°F-120°F

Precision Lubricators

Ideal for the customer who wants trouble-free protection and tamper proof reliability. Drop style allows precise setting and then removal of adjustment knob. Perfect for lubrication of air motors, tools, valves or where low air flow is encountered or where extremely fine adjustments are necessary.

WARNING: POLYCARBONATE BOWLS CAN BE CHEMICALLY ATTACKED AND RUPTURE. CHECK INSTRUCTION SHEET WITH EACH LUBRICATOR FOR LIST OF KNOWN HARMFUL CHEMICALS.

- Sight glass dome on drop type allows observation for instant drip rate adjustment
- Tamper proof
- Lubricator may be filled without shutting down line pressure
- Oil supply tube check valve guarantees INSTANT START-UP LUBRICATION
- Low pressure drop at full air flow
- Oil delivered at an air flow as low as 2 SCFM



PRECISION LUBRICATORS									
PART NO.	NPT	ORDER NO.	PRICE EACH	BOWL TYPE	BOWL CAPACITY	MAX. SCFM	MAX INLET PSI	TEMP. OP. RANGE	TYPE
1028	1/4"	3350-569	\$49.12	POLY W/ GUARD	5 OZ	16	150	40°F-125°F	DROP
1028-8	1/4"	3350-571	54.88	METAL	6 OZ	16	200	40°F-160°F	DROP
1029	3/8"	3350-574	49.60	POLY W/ GUARD	5 OZ	82	150	40°F-125°F	DROP
1029-8	3/8"	3350-576	55.04	METAL	6 OZ	82	200	40°F-160°F	DROP
1030	1/2"	3350-577	49.60	POLY W/ GUARD	5 OZ	142	150	40°F-125°F	DROP
1030-8	1/2"	3350-579	55.04	METAL	6 OZ	142	200	40°F-160°F	DROP
1031-8	1/2"	3350-580	64.56	METAL	9 OZ	142	200	40°F-160°F	DROP
1131-9	3/4"	3350-684	81.52	METAL	10 OZ	142	250	40°F-160°F	DROP
1131-10	3/4"	3350-685	140.96	METAL	20 OZ	142	250	40°F-160°F	DROP
1132-8	1"	3350-686	108.64	METAL	29 OZ	175	250	40°F-160°F	WICK
S-1150	1/4"	3350-703	39.36	POLY	1 OZ	16	150	40°F-120°F	DROP
1150 M	1/4"	3350-705	43.12	METAL	1 OZ	16	150	40°F-120°F	DROP
1150-1	1/8"	3350-704	43.12	METAL	1 OZ	16	150	40°F-120°F	DROP

REPAIR PARTS			
LUBRICATOR PART NO.	BOWL KIT	ORDER NO.	PRICE EACH
1028	1028-P	3350-573	\$22.32
1028-8	1028-M	3350-572	35.04
1029	1028-P	3350-573	22.32
1029-8	1028-M	3350-572	35.04
1030	1028-P	3350-573	22.32
1030-8	1028-M	3350-572	35.04
1031-8	P1031M	3351-374	59.12
1131-9	P1131-18	3351-375	71.32
1131-10	P1131-19	3351-376	97.26
1132-8	P1155-2	3351-377	127.20
S-1150	1152	3350-706	10.37
1150 M	1152-1	3350-707	16.96
1150-1	1152-1	3350-707	16.96

Piggyback Filter/Regulator

Piggyback duo has the features of the standard regulator, plus the space saving convenience of a combined filter. Gage not included, but available as an accessory.

- Non-rising adjustment
- 3 position knob lock/adjust/remove

FILTER/REG. PART NO.	BOWL KIT	REPAIR PARTS		FILTER	ORDER NO.	PRICE EACH
		ORDER NO.	PRICE EACH			
1109	P1109 M	3351-378	\$71.16	P1110-9	3351-379	\$18.06
1110	P1109 M	3351-378	71.16	P1110-9	3351-379	18.06
1111	P1109 M	3351-378	71.16	P1110-9	3351-379	18.06
S-1142	1152	3350-706	10.37	1144-1	3350-695	6.16
1142-1	1152	3350-706	10.37	1144-1	3350-695	6.16



1109

PIGGYBACK FILTERS/REGULATORS

PART NO.	NPT	ORDER NO.	PRICE EACH	BOWL TYPE	BOWL CAPACITY	MAX. SCFM	OPEN RANGE PSI	MAX INLET PSI	TEMP. OP. RANGE	FILTER ELEMENT (MICRON)	AUTO OVERN'T DRAIN
1109	1/4"	3350-663	\$81.12	METAL	6 OZ	50	2-125	200	40°F-160°F	40	YES
1110	3/8"	3350-665	81.52	METAL	6 OZ	80	2-125	200	40°F-160°F	40	YES
1111	1/2"	3350-667	81.76	METAL	6 OZ	100	2-125	200	40°F-160°F	40	YES
S-1142	1/4"	3350-691	53.28	POLY	1 OZ	25	0-125	150	40°F-120°F	20	YES
1142-1	1/8"	3350-692	59.04	METAL	1 OZ	25	0-125	150	40°F-120°F	20	YES

Deluxe F-R Duo

- Factory assembled
- Automatic overnight drains
- Relieving regulator
- Complete with gage #1191
- 40 micron filter element
- Outlet pressure range: 2-125 PSI
- Temperature range: 40° F to 150° F



1106

Deluxe F-R-L Trios

- Filter has automatic overnight drain
- Relieving regulator, drop style lubricator
- Complete with gage #1191
- 40 micron filter element
- Outlet pressure range: 2-125 PSI
- Temperature range: 40° F to 150° F



1100

DELUXE F-R DUO

MILTON PART. NO.	NPT	BOWL TYPE	MAX SCFM	MAX PSI	ORDER NO.	PRICE EACH
1106	1/4"	Poly with metal guard	48	150	3350-660	\$97.28
1107	3/8"	Poly with metal guard	75	150	3350-661	97.28
1108	1/2"	Metal bowl	100	250	3350-662	110.40

DELUXE F-R-L TRIOS

MILTON PART. NO.	NPT	BOWL TYPE	FACTORY ASSEMBLED	MAX SCFM	MAX PSI	ORDER NO.	PRICE EACH
1100	1/4"	Poly with metal guard	Yes	150	16	3350-657	\$142.32
1101	3/8"	Poly with metal guard	Yes	150	80	3350-658	142.32
1102	1/2"	Metal bowl	No	250	100	3350-659	167.84

Deluxe Mini F-R-L Trio



S-1140

When space is a problem we recommend the mini filter-regulator-lubricator which offers most of the same features as our full size units. Comes pre-assembled with 0-160 PSI gage (#1189). Length: 5 1/4" x height: 6 1/2". Maximum SCFM 20.

MILTON PART. NO.	DESCRIPTION	ORDER NO.	PRICE EACH
S-1140	1/4" NPT Filter, Regulator, Lubricator	3350-690	\$97.44

Pressure Gages

Milton high quality dry gages for reliable service with compressors, filters-regulators-lubricators, air lines, pneumatic tools & equipment.

- Resistant to heat, corrosion, water, salt water, and oil
- Can be used in steam applications if less than 120° F
- Brass mechanism. ABS case. Polycarbonate lens
- Maximum working pressure: Should be limited to 75% of dial range
- Maximum working temperature: -13° F to +120° F



1193

MILTON PART. NO.	NPT	MOUNT	PSI RANGE	FACE	ORDER NO.	PRICE EACH
1188	1/8"	Mini center back	0-60 PSI	1 1/2"	3350-724	\$12.24
1189	1/8"	Mini center back	0-160 PSI	1 1/2"	3350-725	12.24
1190	1/4"	Center back	0-60 PSI	2"	3350-726	10.96
1191	1/4"	Center back	0-160 PSI	2"	3350-727	10.96
1192	1/4"	Center back	0-300 PSI	2"	3350-728	10.96
1193	1/4"	Bottom	0-60 PSI	2"	3350-729	10.96
1194	1/4"	Bottom	0-160 PSI	2"	3350-730	10.96
1195	1/4"	Bottom	0-300 PSI	2"	3350-731	10.96

Compressor Pressure Switches

Furnas universal pressure switches are suitable to replace pressure switches on compressors up to: 2 HP @ 120V 1 phase, 3 HP @ 240V 1 phase or 5 HP @ 240V 3 phase. Combination terminals can be used with quick connects (slip on terminals) or standard screw terminals. Auto-off disconnect lever and rotating unloader valve for applications requiring these modifications. Four 1/4" NPT female port manifold complete with plugs. UL listed, CSA certified. Switches are in displayable packaging.

S-1060 PRESSURE SWITCH 95-125 PSI
Order No. 3350-591 ...Price Each: \$46.16

S-1062 PRESSURE SWITCH 140-175 PSI
Order No. 3350-592 ...Price Each: \$46.72



S-1060

Pneumatic Exhaust Mufflers

Muffler-filters use a porous sintered bronze, bonded to a copper plated steel pipe threaded fitting. These 40 micron exhaust mufflers diffuse air and muffle noise from exhaust ports of air tools, cylinders and valves to an acceptable OSHA noise requirements.



S-1086-2

- Maximum operating pressure: 300 PSI
- Operating temperatures: 40° F to 300° F

Ctn. Qty.: 5

MILTON PART. NO.	SIZE	LENGTH	HEX	WEIGHT (LBS.)	CTN. QTY.	ORDER NO.	PRICE EACH
S-1086-2	1/8" NPT	1 1/8"	7/16"	.02	5	3350-603	\$4.03
S-1086-4	1/4" NPT	1 3/8"	9/16"	.04	5	3350-606	4.35
S-1086-6	3/8" NPT	1 1/2"	9/16"	.05	5	3350-609	5.60
1086-8	1/2" NPT	1 7/8"	7/8"	.10	-	3350-611	5.36

ASME Coded Safety Valves



S-1090-70

Valves are manufactured to ASME standards and certified by the national board of boiler and pressure vessel inspectors. Bubble tight to 10% of set pop-off pressure. Milton ASME safety valves are interchangeable with all other ASME valves of same size and pressure. 2" length.

MILTON PART. NO.	MALE NPT	POP-OFF PRESSURE	AIR FLOW POP-OFF PSI	ORDER NO.	PRICE EACH
S-1090-70	1/4"	70 PSI	70 CFM	3350-621	\$10.51
S-1090-125	1/4"	125 PSI	120 CFM	3350-623	10.51
S-1090-150	1/4"	150 PSI	140 CFM	3350-625	10.51
S-1090-200	1/4"	200 PSI	170 CFM	3350-627	10.51

Full Port Brass Ball Valves

These high capacity ball valves are designed for use with compressed air, water or oil to isolate segments of the system without disrupting service to the rest of the system. All brass body with plated steel ball, teflon seals, plated 1/4 turn handle.



S-1094-4

- Maximum working pressure air, water, oil: 400 PSI
- Maximum working pressure steam: 150 PSI
- Temperature: -20° F to 350° F

MILTON PART. NO.	FEM. X FEM NPT	BODY LENGTH	MAX PRESSURE AT 210° F (PSI)	ORDER NO.	PRICE EACH
S-1094-4	1/4" x 1/4"	1 3/4"	280	3350-642	\$10.56
S-1094-6	3/8" x 3/8"	1 3/4"	260	3350-644	11.44
S-1094-8	1/2" x 1/2"	2 1/2"	250	3350-646	12.16
1094-12	3/4" x 3/4"	2 1/2"	220	3350-647	16.48
1094-16	1" x 1"	3 1/4"	190	3350-648	23.52

Breather Vents

Offer vacuum relief or pressure equalization on gear boxes, oil tanks or reservoirs. Prevents dirt and particles from entering open ports. 40 micron units have standard pipe thread for quick assembly or removal.

- Maximum working pressure: 150 PSI
- Operating temperatures: 35° F to 300° F

MILTON PART. NO.	MALE NPT SIZE	CTN. QTY.	ORDER NO.	PRICE EACH
1088-2	1/8"	10	3350-613	\$1.60
S-1088-4	1/4"	10	3350-615	2.18
S-1088-6	3/8"	5	3350-617	2.86
S-1088-8	1/2"	5	3350-619	3.65



S-1088-6

Milton "safety" blo-guns in this section meet OSHA requirements of special relief holes in nozzle which limits pressure to 30 PSI when dead ended (static pressure).²
 For use on regulated compressed air lines maximum PSI 150. Always use personal protective equipment such as safety goggles and ear protection.

Safety Button Blo-Gun

Compact hand held unit can be used anywhere with compressed air. Streamlined comfort fit and full volume control. Many uses such as cleaning fuel and oil lines, or air cleaners, drying out wet ignition systems and spark plugs or blowing out dirt filings and metal chips.

- Maximum working pressure: 150 PSI
- Maximum nozzle pressure: 30 PSI when dead ended
- SCFM 11.4 @ 100 PSI
- 1/4" NPT air inlet, nozzle thread 5/16"-24
- Zinc die cast body
- OSHA compliant

S-107 SAFETY BUTTON BLO-GUN
Order No. 3350-012...Price Each: \$6.38



S-107

Compact Safety Lever Blo-Gun

Compact and versatile blo-gun comes with both a safety nozzle and rubber tip nozzle. Hang-up hook for easy storage. Ctn. Qty.: 10

- Maximum working pressure: 150 PSI
- SCFM 11.7 @ 100 PSI safety-tip
- SCFM 12.9 @ 100 PSI rubber tip
- 1/4" NPT air inlet
- Zinc die-cast body
- OSHA compliant with safety tip only

S-148 COMPACT SAFETY LEVER BLO-GUN
Order No. 3350-030...Price Each: \$6.67



S-148

Adjustable Aluminum Pocket Blo-Guns

Easy grip two finger control to adjust from full volume air flow to complete shut off. Knurled grip for secure handling even with oily or greasy fingers. Always keep one handy with included shirt pocket clip. 4 different models to fit popular coupler interchange styles.

- Maximum inlet pressure: 150 PSI
- SCFM 15.9 @ 100 PSI

S-115 M-style Fits M-style or any 1/4" Industrial style coupler

Order No. 3350-016...Price Each: \$4.96

S-116 A-style Fits A-style or any 1/4" Aro 210 style coupler

Order No. 3350-018...Price Each: \$4.96

S-117 T-style Fits T-style or any 1/4" Tru-Flate/Parker style coupler

Order No. 3350-019...Price Each: \$4.96

S-118 L-style Fits L-style or any 1/4" Lincoln style coupler

Order No. 3350-020...Price Each: \$5.63



S-115

S-116


S-117

S-118

Full-Flow Safety Lever Blo-Gun

- Maximum working pressure: 150 PSI • SCFM 10.0 @ 100 PSI
- 1/4" NPT air inlet, nozzle thread size: 7/16"-27
- Body outlet thread size 1/2"-27
- OSHA compliant

S-150 FULL FLOW SAFETY LEVER BLO-GUN
Order No. 3350-034...Price Each: \$9.33



S-150

Rubber Tip Blo-Guns

- 1/4" NPT air inlet. Rubber tip


S-153 LEVER BLO-GUN
Order No. 3350-041...Price Each: \$9.90



S-153

- 1/4" NPT air inlet.
- Rubber tip. 45° bent tube is ideal for automatic transmissions
- Maximum working pressure: 150 PSI
- SCFM 11.4 @ 100 PSI

S-154 LEVER BLO-GUN Ctn. Qty.: 5
Order No. 3350-043...Price Each: \$11.09

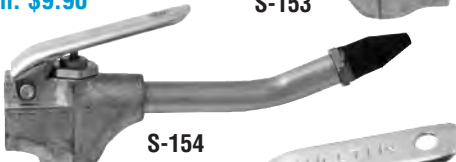

S-154

151 CONTROL VALVE Ctn. Qty.: 10
Order No. 3350-036...Price Each: \$7.84


151



Siphon Spray Blo-Gun

Excellent for degreasing engines, garage bays and parts, spraying live stock, plants and flowers. Perfect for rust proofing tools and machinery and lubricating parts and engines. Kit comes complete with #156 siphon blo-gun, 8' of tubing, and displayable vinyl storage pouch.

S-156 SIPHON SPRAY BLO-GUN
Order No. 3350-045
Price Each: \$12.35
 Ctn. Qty.: 5



S-156

- Maximum working pressure: 150 PSI
- SCFM 14.0 @ 100 PSI
- 1/4" NPT air inlet

S-157 SIPHON SPRAY BLO-GUN KIT
Order No. 3350-046
Price Each: \$17.31



S-157

Pistol Grip Blo-Gun

Pistol style multi use blo-gun.

Accepts Milton #122, 6" ext. and #123, 10" ext.

- Maximum working pressure: 150 PSI • SCFM 10.0 @ 100 PSI
- 1/4" NPT air inlet • Nozzle thread 1/8"-27 NPS
- Zinc die-cast, chrome plated body

S-160 PISTOL GRIP BLO-GUN
Order No. 3350-051...Price Each: \$14.56



S-160

Lever Hook Blo-Gun

- Max. working pressure: 150 PSI
- Max. nozzle pressure: 30 PSI when dead ended
- SCFM 10.6 @ 100 PSI
- 1/4" NPT air inlet, nozzle thread 1/8"-27
- Zinc die cast body, steel plated handle
- OSHA compliant

S-120 LEVER HOOK BLO-GUN
Order No. 3350-022...Price Each: \$9.81



S-120

Brass Extensions

Fits most blo-guns with nozzle thread of 1/8" NPS including Milton numbers 120, S 120, S160

122 - 6" BLO-GUN EXTENSION No. 3350-024 Price: \$8.29
123 - 10" BLO-GUN EXTENSION No. 3350-025 Price: \$10.35



Comfort Grip Blo-Guns

Comfort grip squeeze handle allows variable air volume. Built in hang-up hole allows for easy storage. Angled brass nozzle allows easy access to hard to reach areas.

- Maximum working pressure: 142 PSI • SCFM 11.4 @ 100 PSI
- 1/4" NPT air inlet • Plastic body

S-166 COMFORT GRIP BLO-GUN, 4" EXTENSION
Order No. 3350-055...Price Each: \$11.68

S-167 COMFORT GRIP BLO-GUN, 10" EXTENSION
Order No. 3350-056...Price Each: \$12.32



S-166

S-167

Adjustable air flow regulator allows variable air volume. Rubber tip won't mar delicate surfaces. Built in hang-up hook allows for easy storage.

- Maximum working pressure: 110 PSI
- 4" extension • SCFM 13 @ 90 PSI
- 1/4" NPT brass air inlet • Plastic body

S-174 RUBBER TIP BLO-GUN
Order No. 3350-061...Price Each: \$11.31



S-174

Safety Extension Blo-Gun

OSHA approved multi-punction blo-gun comes with a safety nozzle and rubber tip nozzle. Extension is bent to access hard to reach areas such as motors, machinery, transmissions, combines, and hidden areas . Display packed.

S-158 2' EXTENSION BLO-GUN

Order No. 3350-047
Price Each: \$18.80



S-158

S-158 4' EXTENSION BLO-GUN

Order No. 3350-049 Price Each: \$22.56

Rubber Tip For Blo-Guns

For use where leak-proof connection is required when blowing out fluid lines. O-ring seals create an air-tight connection. A must where metal tip could mar delicate finish in molds or paint. Dual thread design permits use on all blo-guns with 7/16"-27 and 1/8" NPS

S-152 RUBBER BLO-GUN TIP

Order No. 3350-038
Price Each: \$2.85



Window Inflator Gage

Heavy duty construction provides long service life even with constant use. Gage cartridge and valve cartridge replaceable. All window inflator gages equipped with magnifying lens for full view of scale.

Model 501: For high pressure truck tires. 10 lbs. to 160 lbs., in 2 lb. increments. Gage complete with a 5' hose with dual head straight foot chuck for innerduals with lock on threads both ends (full swivel). Built in deflator to relieve excess pressure. Meets OSHA regulation No. 1910.177 on inflation.

Model 501 WINDOW INFLATOR GAGE
Order No. 3350-173 Price Each: \$59.68



Truck Inflator Gage With 15' Hose

Newer steel belted sidewall tires on trucks present a potential danger during inflation. Milton's NEW 501 inflator keeps the technician 15' out of harm's way. Heavy duty construction provides long service life even with constant use. Gage & valve cartridges are replaceable. All window inflator gages equipped with magnifying glass for full view of scale.

- 15' hose, 10 -160 PSI
- Built in deflator to relieve excess pressure
- Dual foot locking chuck
- Heavy duty construction
- Magnifying lens
- Unit pack qty. - 1, wt. 4 lbs.

98-A1-501 TRUCK INFLATOR GAGE WITH 15' HOSE

Order No. 3350-174 Price Each: \$74.08



Filler Faucets

Easy operation and smooth flow due to long flexible rubber spout with lever control. Heavy duty, ruggedly built with stainless steel springs. Operating pressure: standard municipal (city) water Pressure 30 - 35 psi, nitrile rubber, zinc alloy body 209 FEMALE 1/4" NPT THREAD

Order No. 3350-066 Price Each: \$11.52



Window Inflator Gage Replacement Parts

OSHA approved multi-punction blo-gun comes with a safety nozzle and rubber tip nozzle. Extension is bent to access hard to reach areas such as motors, machinery, transmissions, combines, and hidden areas . Display packed.

507 REPLACEMENT GAGE CARTRIDGE

Order No. 3350-182
Price Each: \$12.24



507 HOSE WHIP ASSEMBLY COMPLETE

Order No. 3350-185
Price Each: \$11.20



512 REPLACEMENT VALVE CARTRIDGE

Order No. 3350-188
Price Each: \$6.96



Repair Parts For Inflator Gages

OSHA approved multi-punction blo-gun comes with a safety nozzle and rubber tip nozzle. Extension is bent to access hard to reach areas such as motors, machinery, transmissions, combines, and hidden areas . Display packed.

500-4 DUAL HEAD CHUCK
(Free flowing for tire gages only)

Order No. 3350-169
Price Each: \$2.88



500-6 STANDARD SIZE WASHER
(For dual head chuck & straight head chuck)

Order No. 3350-170
Price Each: \$0.29



500-6 STANDARD SIZE WASHER
(For single head chuck)

Order No. 3350-171
Price Each: \$0.29

Brass Hose Ferrules

Economical and dependable brass ferrules to make custom hose assemblies. Refer to chart to choose ferrules required for custom sizes.



MILTON PART. NO.	SIZE	HOSE OD	ORDER NO.	PRICE EACH
1654-2	1" x .525 ID	1/2	3350-838	\$0.42
1654-3	1" x .562 ID	9/16	3350-840	0.43
1654-4	1" x .593 ID	19/32	3350-842	0.43
1654-5	1" x .625 ID	5/8	3350-844	0.45
1654-6	1" x .656 ID	21/32	3350-846	0.46
1654-7	1" x .687 ID	11/16	3350-848	0.46
1654-8	1" x .718 ID	23/32	3350-850	0.51
1654-9	1" x .750 ID	3/4	3350-852	0.51
1654-12	1" x .900 ID	7/8	3350-854	0.51

Air Chucks

WARNING: SEALING TYPE CHUCKS ARE NOT FOR USE ON MILTON INFLATOR GAGES.

Max: 150 PSI




S-690 S-692 S-693 S-698 S-699 S-697 Ctn. Qty.: 10

MILTON PART. NO.	DESCRIPTION	SIZE	ORDER NO.	PRICE EACH
S-690	Dual Head	1/4" female NPT	3350-362	\$5.68
S-691	Straight Head	1/4" female NPT	3350-364	0.00
S-692	Safety Grip Chuck Clip: fits all standard single head air chucks		3350-365	4.67
S-693	Dual Head Straight Foot, for inner duals, ends lock on threads	1/4" female NPT	3350-367	8.16
S-696	Kwik-Grip Safety Chuck	1/4" NPT	3350-372	7.52
S-697	Euro Style Chuck Clip	1/4" ID hose barb	3350-374	11.39
S-698	Chuck Clip w/Female Chuck	1/4" NPT	3350-376	6.32
S-699	Female Single Head Chuck	1/4" NPT	3350-379	1.86

Inflator Gage (Window)

Heavy-duty construction provides long service life, even with constant use. Gage/valve cartridges replaceable. All gages equipped with magnifying lens for full view of scale.

S-506 Gage Complete, Dual Head Chuck (Full Swivel), 15" Hose
Order No. 3350-181...Price Each: \$38.34



S-506

Dial Type Pressure Gages

Precision made, rugged bronze bourdon tube, 2" face with unbreakable lens, and easy to read dial. Pressure is indicated until release valve is depressed. Every gage is tested against master gages prior to packaging.

Ctn. Qty.: 5

• Angled single head chuck
S-901 0-15 PSI in 1/2 lb increments.
Order No. 3350-523...Price Each: \$18.24

• Angled single head chuck
S-902 0-60 PSI in 1 lb increments.
Order No. 3350-524...Price Each: \$18.24



S-901
S-902

Mini Disposable Air Line Dessicant Filter/Dryer

Removes all traces of dirt, dust, water vapor, oil vapor. Unit ideal for spray guns and applications requiring clean supply of air. 3 3/4" x 1 1/2" size. Light weight 2 oz. Male & female 1/4" NPT ports. See through, non-metallic chemical resistant material. Replace unit when dessicant changes to pink in color.

- Maximum working pressure: 125 PSI
- Maximum flow capacity: 15 SCFM
- Working temperature: 32° F to 130° F (0° to 54° C)
- 2/cd

S-1173 MINI IN LINE DESICCANT DRYER
Order No. 3350-718...Price Per Card: \$22.16



S-1173

Pencil Type Pressure Gages

Consumer tire gages are molded of rugged Delrin with strong flexible white NYLON INDICATOR BAR to provide long trouble free life with the same certified accuracy associated with all Milton tire gages. Always check tire pressure when tires are cold. (Ctn. Qty.: 10)



S-911

• Flat bar is marked 5 to 50 PSI in 1 lb increments on both sides.
S-911 CAR TIRE GAGE FOR RADIAL AND CONVENTIONAL TIRES.

Order No. 3350-529...Price Each: \$3.04

USA made tire gages provide accurate, long life with trouble free performance. Durable plated brass with 4 side nylon indicator bar. Always check tire pressure when tires are cold. (Ctn. Qty.: 10)



S-917

• 2 sides 2 to 20 PSI, in 1 lb increments and 2 sides 20 to 140 kPa, in 10 kPa units
S-917 LOW PRESSURE GAGE IDEAL FOR USE ON ATV'S, GOLF CARTS AND AIR SPRINGS.

Order No. 3350-535...Price Each: \$5.60



S-920

• PSI mini spare tire. Built in tire tread depth gage in 1/16" increments.
• 2 sides 10 to 70 PSI in 2 lb increments and 2 sides 60 to 500 kPa in 10 kPa units
S-920 HIGHER PRESSURE AUTOMOBILE TIRES, including 60

Order No. 3350-536...Price Each: \$5.52



S-921

• 2 sides 5 to 50 PSI in 1 lb increments and 2 sides 40 to 350 kPa in 10 kPa units
S-921 PASSENGER CAR TIRE GAGE FOR RADIAL & CONVENTIONAL TIRES.

Order No. 3350-537...Price Each: \$4.64



S-923

• 2 sides 5 to 50 PSI in 1 lb increments and 2 sides 40 to 350 kPa in 10 kPa units
• 1 lb increments and 2 sides 40 to 350 kPa in 10 kPa units

S-923 STRAIGHT CHUCK CAR TIRE GAGE FOR RADIAL & CONVENTIONAL TIRES. Order No. 3350-538...Price Each: \$4.96



S-925

• 2 sides 20 to 120 PSI in 2 lb increments and 2 sides 120 to 820 kPa in 20 kPa units
S-925 TRUCK, RV, BICYCLE TIRE GAGE.

Order No. 3350-539...Price Each: \$4.80



S-927

• 2 sides 20 to 120 PSI in 2 lb increments 2 sides 120 to 820 kPa in 20 kPa units
S-927 DUAL CHUCK TRUCK TIRE GAGE.

Order No. 3350-540...Price Each: \$7.04



S-928

• 2 sides 5 to 50 PSI in 1 lb increments and 2 sides 40 to 350kPa in 10 kPa units

S-928 TRACTOR TIRE GAGE FOR AIR/WATER FILLED TIRES.

Order No. 3350-541...Price Each: \$6.64

Service Gages

Milton precision engineered service gages provide accurate, long life trouble free performance. Plated brass tube and 4 sided nylon indicator bar. Calibrated 2 sides 10 to 160 PSI, in 2 lb increments and 2 sides 80 to 1100 kPa, in 20 kPa units. (Ctn. Qty.: 5)



S-976

S-976 DUAL HEAD CHUCK SERVICE GAGE
Order No. 3350-543...Price Each: \$15.60



S-986


S-986 STRAIGHT FOOT DUAL HEAD CHUCK SERVICE GAGE FOR INNER STYLE DUALS

Order No. 3350-545 ...Price Each: \$18.56

Brass Hose Ends

Brass hose fittings packed 10 per Box. Skin cards bulk packed, fitting quantities check Milton price sheet. NPT=National Pipe Taper (Tapered Thread for general use)

Hose ID = Inside diameter of hose. Hose OD = Outside diameter of hose.



S-600

S-605

Ctn. Qty.: 10, 2/cd

MILTON PART. NO.	DESC.	HOSE ID	THREAD	CARD PACK	ORDER NO.	PRICE PER CARD
S-600	Male	1/4"	1/4" NPT	2	3350-206	\$1.81
S-601	Male	5/16"	1/4" NPT	2	3350-212	2.03
S-602	Male	3/8"	1/4" NPT	2	3350-215	2.03
S-603	Male	3/8"	3/8" NPT	2	3350-218	2.53
S-605	Female, non swivel	1/4"	1/4" NPT	2	3350-224	2.53
S-605-2	Female, non swivel	3/8"	1/4" NPT	2	3350-228	2.59

Brass Male Full Swivel Fittings



Ctn. Qty.: 5

S-611-6

MILTON PART. NO.	HOSE ID	NPT THREAD	ORDER NO.	PRICE EACH
S-611-6	3/8"	1/4"	3350-240	\$ 3.30

Brass Hose Menders



Ctn. Qty.: 10, 2/cd

S-640

MILTON PART. NO.	HOSE ID	CARD PACK	ORDER NO.	PRICE PER CARD
S-640	1/4" x 1/4"	2	3350-276	\$2.64
S-641	5/16" x 5/16"	2	3350-279	2.58
S-642	3/8" x 3/8"	2	3350-281	2.58

Variable Angle Swivel Fittings

Fittings rotate 360° at a 45° angle in any direction virtually eliminating hose twisting and kinking. Rubber dust cover.

- Max. working pressure: 145 PSI
- Temp. range



S-99681-1

S-99681

S-99681-4

Ctn. Qty.: 5

SWIVEL FITTINGS				
PART NO.	NPT SIZE	CONNECTION	ORDER NO.	PRICE EACH
S-99681	1/4" Male NPT	1/4" Male	3351-347	\$5.92
S-99681-1	1/4" Female NPT	1/4" Male	3351-348	5.92
S-99681-4	1/4" M-Style Plug	1/4" Male	3351-351	5.92

Full Swivel Hose Ends

Ctn. Qty.: 10

MILTON PART. NO.	MALE NPT SIZE	NPT OR ID	ORDER NO.	PRICE EACH
S-659	1/4"	1/4" NPT female swivel end	3350-331	\$ 6.29



S-659

Reusable Brass Hose Fittings



S-617

Note: S-617 may be used with 5/16" hose.

Ctn. Qty.: 10

MILTON PART. NO.	DESCRIPTION	HOSE OD	HOSE ID	NPT	ORDER NO.	PRICE EACH
S-617	Male end	5/8"	1/4"	1/4"	3350-260	\$2.74
S-621	Male end	3/4"	3/8"	1/4"	3350-264	3.49

Brass Fittings

Ctn. Qty.: 10, 2/cd

MILTON PART. NO.	DESC.	THREAD SIZE (NPT)	CARD PACK	ORDER NO.	PRICE PER CARD
S-643	Female	1/4" x 1/4"	2	3350-285	\$2.13
S-646	Male hex nipple	1/4" x 1/4"	2	3350-291	\$2.14



S-646

Air Hose Swivel Connector

Attach portable air tools to air hose. 360° swivel in two places prevents hose kinking, and keeps the hose out of the way. Female pipe threads connect to most hose fittings and adapters. Not for use with percussion tools.



S-657-2

MILTON PART. NO.	DESC.	ORDER NO.	PRICE EACH
S-657	1/4" Swivel Connector	3350-320	\$ 8.69
S-657-1	3/8" Swivel Connector	3350-321	9.46
S-657-2	1/4" Swivel Connector w/Flow Control	3350-322	10.96

3-in-1 Air Manifolds

Supply 3 air tools from a single inlet. No need to disconnect and connect for every tool change. Sturdy and lightweight aluminum body.



S-685-4

MILTON PART. NO.	INLET NPT FEMALE	3 OUTLETS NPT FEMALE	ORDER NO.	PRICE EACH
S-685-4	1/4"	1/4"	3350-354	\$ 8.54
S-685-6	3/8"	1/4"	3350-356	8.99

Drain Cocks

- Brass body • Steel handle

Ctn. Qty.: 10, 2/cd

MILTON PART. NO.	NPT	CARD PACK	ORDER NO.	PRICE PER CARD
S-614-2	1/8"	2	3350-246	\$ 2.45
S-614-4	1/4"	2	3350-249	2.82



S-614-2

In-Line Air Flow Regulators

To regulate air pressure to air tools from full flow to complete shut-off. Use as shut-off valve for air and non-corrosive liquids.

- Maximum: 150 PSI
- SCFM 5 @ 100 PSI
- Temperature range: 40° F to 250° F

MILTON PART. NO.	FEMALE NPT	MALE NPT	ORDER NO.	PRICE EACH
S-638	1/4"	1/4"	3350-271	\$12.16
S-638-1	1/4"	1/4" w/gage	3350-272	21.28



S-638-1

In-Line Lubricator

To lubricate pneumatic tools for full protection by accurately metering correct amount of oil. 1/2 oz capacity.

MILTON PART. NO.	MALE NPT SIZE	FEMALE NPT SIZE	ORDER NO.	PRICE EACH
S-639	1/4"	1/4"	3350-274	\$16.32



S-639

Tank Valves

Attach portable air tools to air hose. 360° swivel in two places prevents hose kinking, and keeps the hose out of the way. Female pipe threads connect to most hose fittings and adapters. Not for use with percussion tools.

Ctn. Qty.: 10

MILTON PART. NO.	NPT	CARD PACK	ORDER NO.	PRICE PER CARD
S-684	1/8"	2	3350-349	\$2.53
S-684-4	1/4"	2	3350-352	3.84



S-684

Nylon Re-Koil Air Hose

Assembled with re-usable, full flow male NPT swivel fittings on both ends to avoid twisting and kinking. Individual display bag packaged. Resists abrasions.

- Maximum working pressure: 200 PSI @ 70° F
- Working temperature: -40° F to 180° F (-38° C to 82° C)
- Material: Equivalent to nylon 12
- Color: Yellow



1669

MILTON PART. NO.	HOSE ID	LENGTH	SWIVEL MALE NPT	ORDER NO.	PRICE EACH
1667	1/4"	12'	1/4"	3350-856	\$12.40
1669	1/4"	25'	1/4"	3350-857	16.00
1670	1/4"	50'	1/4"	3350-861	28.56
1674	3/8"	25'	3/8"	3350-872	30.88


Tank Conversion Kit

Do it yourself kit allows you to convert all no longer allowed R-12 freon tanks to portable air tanks.

WARNING: NOT FOR PROPANE TANK CONVERSION.

KIT contains: filler valve, gage, 4' air hose assembly, manifold, chuck

MILTON PART. NO.	DESC.	ORDER NO.	PRICE EACH
S-682	filler valve, gage, 4' air hose assembly, manifold, chuck	3350-342	\$23.31



S-682

Swivel End Snubber Hose

Absorb shock to air couplers from impact tools and/or air hammers. Snubber hoses are fitted with a full 360° steel swivel fitting for greater flexibility and easier use.



S-680-1

- Burst pressure: 800 lbs.
- Maximum working pressure: 200 PSI

MILTON PART. NO.	HOSE ID	LENGTH	360° SWIVEL FITTING NPT	BRASS FITTING	ORDER NO.	PRICE EACH
S-680-1	1/4"	5'	Male 1/4"	Female 1/4"	3350-337	\$15.12
S-680-2	3/8"	30"	Male 1/4"	Female 1/4"	3350-338	11.94

Driveway Signal

Completely self contained unit is easy to install and use just plug into any 110 volt electric outlet. Offers instant signal every time, operating with up to 300 feet of signal hose. For use at service stations, bank or restaurant drive up windows, or any drive up application where an attendant needs to be alerted.


805 DRIVEWAY SIGNAL BELL (6" diameter)
Order No. 3350-516 Price Each: \$56.96



805

EPDM 2 Braid Air Hose

Deluxe heavy duty EPDM rubber is designed for tough service station and shop applications. Kink resistant and flexible in extreme temperatures, resists abrasion, weathering and ozone. Assemblies coupled with brass fittings, bulk hose comes without fittings in either a dispensing box or handy reel. Individually boxed. Limited oil resistance.



1630

- Maximum working pressure: 250 PSI
- Burst pressure: 1000 PSI
- Working temperature: -40° F to 190° F (-38° C to 87° C)
- Material: EPDM rubber tube & cover, spiral synthetic yarn reinforcement
- Color: Red

MILTON PART. NO.	HOSE ID	LENGTH	FITTINGS, NPT	ORDER NO.	PRICE EACH
1630	1/4"	25'	Male 1/4" both ends	3350-816	\$26.08
1631	1/4"	50'	Male 1/4" both ends	3350-820	47.97
1632	3/8"	25'	Male 3/8" both ends	3350-821	34.56
1633	3/8"	50'	Male 3/8" both ends	3350-825	63.97

Remote Control Air Switch, Signal Bell, Chime

Deluxe terminal box construction assures maximum sensitivity with long term performance. Weatherproof for use inside and outside. Easy connections with Barrier terminal strip and conduit openings for versatility in installation.

- Conduit type box construction for wall or conduit mounting. Burn out proof coil assures long service.

825 REMOTE CONTROL AIR SWITCH (use with any voltage from 6V to 220V, 10 amps maximum)
Order No. 3350-518...Price Each: \$73.60



825

Requires Milton air switch #825

827 REMOTE CONTROLLED SIGNAL BELL (110V)
Order No. 3350-519...Price Each: \$61.44



827

- Key slot opening in back makes installation easy. Tone is clear and melodious. Burn out proof coil assures long service.

Requires Milton Air switch #825

830 REMOTE CONTROLLED CHIME (110V)
Order No. 3350-520...Price Each: \$53.92



830

800 Series Accessories

Ctn. Qty.: 5
819 HOSE ANCHOR (for 3/8" ID signal hose)
Order No. 3350-517...Price Each: \$9.92



819

838 DELUXE DRIVEWAY SIGNAL HOSE SBR RUBBER (3/8" ID 50' length)
Order No. 3350-521...Price Each: \$39.36

839 DELUXE DRIVEWAY SIGNAL HOSE SBR RUBBER (3/8" ID 300' reel)
Order No. 3350-522...Price Each: \$205.92



838
839

7.2V MultiPro Cordless Kit 7700-1/15



Ready to go on a minute's notice, this two-speed cordless tool is perfect for a variety of do-it-yourself jobs inside or out. Capable of doing almost anything the standard MultiPro does - except plug into an electrical outlet - you'll want to keep it charged up and handy at all times.

- Go anywhere convenience
- 7.2 Volts for general applications
- Two speeds 10,000 and 20,000 rpm to match the proper speed required
- Removable battery pack lets you use additional packs for continuous use
- 3-hour charger with LED light shows proper charging
- Compact and lightweight for easier handling and less fatigue
- Two-year warranty

7700-1/15 Kit Contains:

- 7.2V Cordless Rotary Tool • 3-Hour Battery Charger
- Lawn Mower and Garden Tool Sharpener
- Wrench • Instruction sheet • Plus 15 more accessories

Order No. 3267-715 Price Each: \$55.45

Rotary Tool Kit 4000-2/30



The Dremel 4000 variable speed rotary tool offers the highest performance and most versatility of all Dremel rotary tools. The increased strength of its motor plus electronic feedback circuitry enables consistent performance at all speed levels. Dremel 4000 can use all existing Dremel accessories and attachments plus high-performance attachments to complete the widest range of projects. A slim, ergonomic body provides a 360-degree grip zone for comfort and control in any grip position.

Kit Contains:

- Dremel 4000 High Performance Rotary Tool
- Circle Cutter/Straight Edge Guide
- Sanding/Grinding Guide
- Storage Case
- Includes 30 genuine Dremel accessories
- Quick Start Book

Order No. 3264-030 Price Ea: 110.60

Rotary Tool Kit - 4000-6/50



The Dremel 4000 variable speed rotary tool offers the highest performance and most versatility of all Dremel rotary tools. The increased strength of its motor plus electronic feedback circuitry enables consistent performance at all speed levels. Dremel 4000 can use all existing Dremel accessories and attachments plus high-performance attachments to complete the widest range of projects. A slim, ergonomic body provides a 360-degree grip zone for comfort and control in any grip position.

Kit Contains:

- Dremel 4000 High Performance Rotary Tool
- Planer attachment • Flex Shaft attachment
- Circle Cutter/Straight Edge Guide
- Sanding/Grinding Guide
- Multipurpose Cutting Guide attachment
- Detail Nose Piece
- Lawn Mower and Garden Tool Sharpening Attachment
- Storage Case • Quick Start Book
- Includes 50 genuine Dremel accessories

Order No. 3264-034 Price Ea: \$190.30

12VMax Lithium-Ion Cordless Rotary Tool Kit - 8200-1/28



The Dremel 8200 variable-speed cordless rotary tool offers the highest performance and versatility of all Dremel cordless rotary tools. The increased strength of its motor facilitates maximum performance at all speed levels. The ability to use all existing Dremel accessories and attachments let the Dremel 8200 complete the widest range of projects. A slim ergonomic body provides a 360-degree grip zone for control in any position. Powered by 12VMAX Lithium-ion battery technology, the Dremel 8200 has a speed of cut that is 2X times faster than the leading cordless rotary tool.

Includes storage case and 28 genuine Dremel accessories
1-hour charger with LED light shows proper charging

- MODEL NUMBER: 8200-1/28
- SPEED: Variable, 5,000 - 30,000 RPM
- VOLTAGE: 12V Max DC

Order No. 3268-200 Price Each: \$125.00

Flex Shaft Attachment Model 225-01

- Ideal for hard to reach places and fine detail work
- Quick connect attach system.
- 36" long cable with new 5" bend radius
- Comfort grip handle
- Integrated shaft lock button
- Holds up to 1/8" shank
- Works with collet system and Dremel chuck

Order No. 3260-225 Price Each: \$31.60

Single Speed Rotary Tool Kit 100-N/7



• Ideal for sanding, carving, and drilling

Set Includes:

- 100 Series Single Speed Rotary Tool
- 402 Mandrel
- 407 Coarse 1/2" Sanding Drum • 415 Dressing Stone
- 420 Heavy Duty Emery Cut-Off Wheel
- 432 1/2" 120 Grit Sanding Band
- 932 Aluminum Oxide Grinding Stone
- 84922 Silicon Carbide Grinding Stone
- CORD LENGTH: 6' • SPEED: 35,000 rpm
- VOLTAGE: 120 AC, 50-60 Hz
- WARRANTY: 2 years

Order No. 3260-098 Price:\$ 49.30

Variable-Speed Rotary Tool Kit 3000-1/24



- Rotary Tool
- Includes Storage Case and 24 Accessories
- Sanding/Grinding Guide Attachment
- EZ Twist™ nose cap with wrench for fast accessory changes
- Tool works with all Dremel accessories and attachments, except PL400 and MS400
- Variable speed from 5,000 to 32,000 RPM

- Cool-running ball bearing construction for smooth and quiet operation
- Replaceable motor brushes extend tool life
- Four year warranty

Order No. 3263-001 Price Each: \$ 85.95

Cordless Two-Speed Rotary Tool Kit 7300-N/8



Designed for drilling, sanding, shaping, detailing and other light-duty jobs:

Can be used with any Dremel accessory bit with up to a 1/8" shank. Two speeds 6,500 and 13,000 rpm to match the proper speed required. Compact and lightweight for easy handling. Two-year warranty

Kit includes:

- 4.8V Cordless Rotary Tool
- 407 1/2" 60 Grit Sanding Drum with Mandrel
- 401 Mandrel
- 414 Felt Polishing Wheel
- 432 1/2" 120 Grit Sanding Band
- 84922 Silicon Carbide Grinding Stone
- Wrench

Order No. 3267-300 Price Each: \$ 33.70

4.8V Battery Pack

- For use with model 7300-N/8

Order No. 3267-551 Price Ea. \$ 17.70



Electric Engraver Model 290-01



Contains:

- Engraver Tool • Carbide Point (9924)
- Letter/Number Template
- Engraves permanently on metal, wood, plastic, ceramics and more.
- Protect valuables, discourage theft.
- Perfect for hobbies and crafts.

Order No. 3260-290 Price Each: \$21.60

Extra CARBIDE Point for normal applications:

Order No. 3269-924 Price Each: \$5.38

Extra DIAMOND Point for Commercial Work:

Order No. 3269-929 Price Each: \$16.58





Right Angle Attachment Model 575






- Enhances the versatility of the Dremel tool, by allowing use in hard-to reach areas
- Ball bearings and spiral bevel gears provide smooth and cool operation
- Coupling system allows orientation of attachment in 12 different directions
- Quick connect system easily attaches to rotary tool in place of the housing cap, no wrench required
- Compact, durable design, for hard-to reach places

Order No. 3260-575 Price Each: \$23.10




Grinding/Sharpening Silicon Carbide Grinding Stones

 9/32" 7,1mm	 3/16" 4,8mm	 25/32" 19,8mm	 13/32" 10,3mm
Order No. 3263-142 Price Ea. \$2.30	Order No. 3264-922 Price Ea. \$2.30	Order No. 3265-422 Price Ea. \$2.30	Order No. 3269-952 Price Ea. \$2.30





Aluminum Oxide Grinding Stones





 3/8" 9,5mm	 1/4" 6,4mm	 3/8" 9,5mm	 1" 25,4mm
Order No. 3260-932 Price Ea. \$2.32	Order No. 3260-953 Price Ea. \$2.32	Order No. 3260-952 Price Ea. \$2.32	Order No. 3268-215 Price Ea. \$2.30

Cut-Off Wheels

 15/16" 23,8 mm .025"thickness 36 per pack	 15/16" 23,8 mm .040"thickness 20 per pack	 1-1/4" 31,8 mm .045"thickness 5 per pack
Order No. 3260-409 Price/Pk. \$4.83	Order No. 3260-420 Price/Pk. \$5.25	Order No. 3260-426 Price/Pk. \$7.02

Carving/Engraving





 5/16" 7,9mm	 1/4" 6,4mm	 1/4" 6,4mm	 1/4" 6,4mm
Order No. 3260-115 Price Ea. \$4.62	Order No. 3260-117 Price Ea. \$4.62	Order No. 3260-121 Price Ea. \$4.62	Order No. 3260-125 Price Ea. \$4.62

 3/16" 4,8mm	 1/8" 3,2mm	 3/8" 9,5mm	 3/32" 2,4mm
Order No. 3260-192 Price Ea. \$4.62	Order No. 3260-194 Price Ea. \$4.62	Order No. 3260-199 Price Ea. \$4.62	Order No. 3260-107 Price Ea. \$2.32

Structured Tooth Tungsten Carbide Cutters

 1/4" 6,4mm	 5/16" 7,9mm	 5/16" 7,9mm
Order No. 3269-931 Price Ea. \$12.12	Order No. 3269-933 Price Ea. \$12.12	Order No. 3269-935 Price Ea. \$12.12

Cleaning/Polishing

 1/2" 6 per pk.	 3/8" Felt	 1" Felt	 Emery Polishing Wheel
Order No. 3260-414 Price Ea. \$2.33	Order No. 3260-422 Price Ea. \$2.33	Order No. 3260-429 Price Ea. \$2.33	Order No. 3260-425 Price Ea. \$2.30




Bristle Brushes

 3/4" 19,1mm	 1/2" 12,7mm	 13/32" 10,3mm	 9/32" 7,1mm
Order No. 3260-403 Price Ea. \$2.30	Order No. 3260-404 Price Ea. \$2.30	Order No. 3260-428 Price Ea. \$2.32	Order No. 3260-442 Price Ea. \$2.32


C.S. Bristle Brushes

 3/16" 4,8mm
Order No. 3260-443 Price Ea. \$2.32

Tungsten Carbide Cutters

 1/8" 3,2mm	 1/8" 3,2mm	 1/8" 3,2mm
Order No. 3269-901 Price Ea. \$8.62	Order No. 3269-903 Price Ea. \$8.62	Order No. 3269-909 Price Ea. \$8.62

Sanding

 1/4"	 1/2"	 1/2" 60 Grit 6 per pk.	 1/2" 120 Grit 6 per pk.	 fine 240 Grit 36 per pk.
Order No. 3260-430 Price Ea. \$3.10	Order No. 3260-407 Price Ea. \$3.13	Order No. 3260-408 Price/Pk. \$2.32	Order No. 3260-432 Price/Pk. \$2.32	Order No. 3260-413 Price/Pk. \$2.57









Flapwheels

 3/8" 9,5mm 80 Grit	 3/16" 4,8mm 120 Grit
Order No. 3260-502 Price Ea. \$5.67	Order No. 3260-505 Price Ea. \$5.67



Collets & Chucks

 1/8" 3,2mm	 1/8" 3,2mm	 1/32" 0,8mm
Order No. 3264-486 Price Ea. \$9.60	Order No. 3260-480 Price Ea. \$2.30	Order No. 3260-483 Price Ea. \$2.30

EZ Lock™ Mandrels/Wheels

 EZ Lock Mandrel	 1" Cloth	 1-1/2" Diamond Wheel	 1-1/2" Cutoff Wheel-Thin Cut 5 per pk.	 1-1/2" Cutoff Wheel-Metal 5 per pk.	 Abrasive Buffs 2 per pk. 180/280 grit	 Detail Abrasive Brush - Coarse 36 grit	 Detail Abrasive Brush - Medium 120 grit	 Detail Abrasive Brush - Fine 220 grit
Order No. 3261-402 Price Ea. \$8.38	Order No. 3261-423 Price Ea. \$3.17	Order No. 3261-545 Price Ea. \$21.13	Order No. 3261-409 Price/Pk. \$9.42	Order No. 3261-546 Price/Pk. \$9.82	Order No. 3261-511 Price/Pk. \$4.13	Order No. 3261-471 Price Ea. \$7.20	Order No. 3261-472 Price Ea. \$7.20	Order No. 3261-473 Price Ea. \$7.20

Mandrels

 Order No. 3260-401 Price Ea. \$2.32	 Order No. 3260-402 Price Ea. \$2.32
---	---

709-01 110 Pcs. Super Accessory Kit

This versatile and re-usable accessory kit includes everything you need to cut, grind, sand, polish, drill, sharpen, clean and more.

Order No. 3260-709
Price Each: \$23.75



710-5 160-Pcs. All Purpose Accessory Kit

This versatile and re-usable accessory kit includes everything you need to cut, grind, sand, polish, drill, sharpen, clean and more. Includes 8 EZ Lock™ accessories.

Order No. 3260-710
Price Each: \$35.42

